

Prolight PLF602VX



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

The Prolight PLF602VX LCD projector has 1700 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a 359 cm image width well. However, if room light is available, the image width should ideally not exceed 239 cm. The model was built by Prolight in 2006 and is no longer current.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

1700
450:1 full on/off
3,7778 min. Lumen

567 Lux (bei 200 cm Screen)
450:1 full on/off
1,268 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

165W Lamp

2000 h.

-

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

2,03-2,5:1

1 x 2W

D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack
RS232C

Yes

230W

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

37dB

3,10 kg / 6,83 lbs.

-


-

H-sync: 15-80 kHz
V-sync: 43-85 Hz

53 fL / max. 359 cm screen width
182 cd/m²

-

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

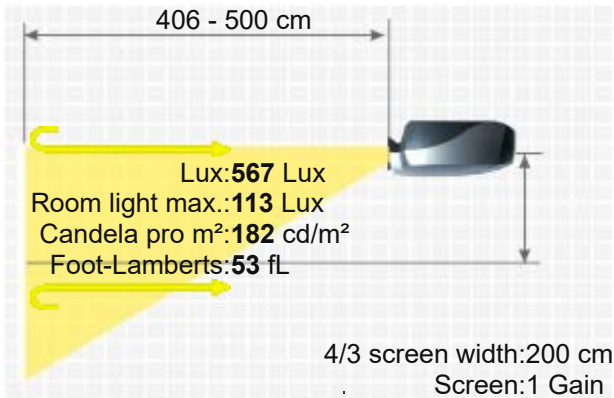

P R O L I G H T P L F 6 0 2 V X

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF602VX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.