

Prolight PLF700AS



P R O L I G H T P L F 7 0 0 A S



The PLF700AS LCD has 1500 Ansi-Lumen, a contrast of 400:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. This model is no longer offered by Prolight.

 3 x 0,7" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector	1500	500 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level Offset	3,7500 min. Lumen	1,259 min. Lumen

Resolution
SVGA 800 x 600
480.000 Pixel
SXGA 1280 x 1024 compressed

Video Modes
PAL, SECAM, NTSC

Application
Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source
165W EHPL Lamp
Articel Nr.: LMPf18718

Light Life
2000 h.

Operating Costs
-

Focus
Manual

Zoom
Manual 1,23

Objective
F=1,7-2,1 f=26-32 mm

Throw Ratio
1,8-2,3:1

Audio
1 x 2W

Connections
D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB

Ceiling Mounting
Yes

Power
-

Size WxHxD
233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise
37dB


Weight
3,10 kg / 6,83 lbs.

Keystone
-

Illumination
-

Frequenz
H-sync: 15-80 kHz
V-sync: 43-85 Hz

Foot-Lamberts
46 fL / max. 337 cm screen width
158 cd/m²

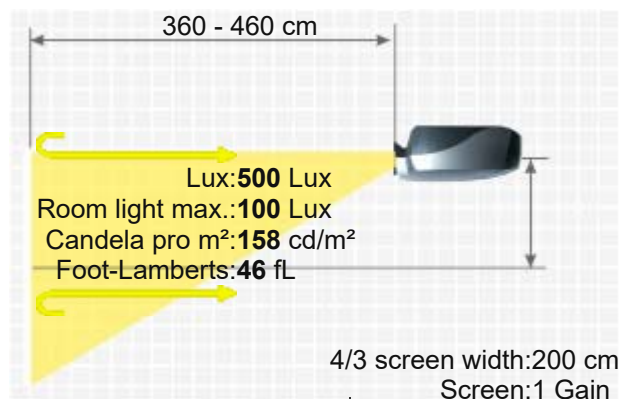

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF700AS-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.