

# Prolight PLF702DS



## Brief Introduction

Beta 2.5

### Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable Prolight PLF702DS LCD projector has 1500 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 337 cm thanks to the 1500 Ansi lumens. In room lighting, however, the image width should ideally be less than 225 cm. The model is no longer offered by Prolight.



3 x 0,7" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

1500

400:1 full on/off

3,7500 min. Lumen

Screen

500 Lux (bei 200 cm Screen)

400:1 full on/off

1,259 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

165W EHPL Lamp

2000 h.

-

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

1,8-2,3:1

1 x 2W

D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack

USB

Yes

230W

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

37dB

3,10 kg / 6,83 lbs.

-

-


H-sync: 15-80 kHz

V-sync: 43-85 Hz

46 fL / max. 337 cm screen width

158 cd/m²

-

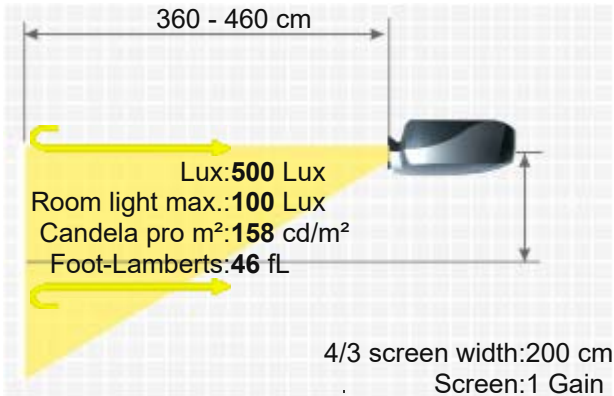

P R O L I G H T P L F 7 0 2 D S

More Details



# HCinema

<https://www.projector-database.com/pro/prolightPLF702ds-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.