

Prolight PLF880BS



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable PLF880BS LCD projector from Prolight has 2000 Ansi lumens, a contrast of 450:1 and an SVGA 800 x 600 resolution. Thanks to the brightness of 2000 Ansi lumens, an image width of 389 cm is possible. In room light, the image should be max. 259 cm wide. This model is no longer available from Prolight.



3 x 0,79" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

2000

450:1 full on/off

4,4444 min. Lumen

Screen

667 Lux (bei 200 cm Screen)

450:1 full on/off

1,492 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

180W Lamp

2000 h.

-

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

1,6-2,0:1

1 x 2W

DVI in

D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack

USB

RS232C

Yes

250W

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

37dB

3,10 kg / 6,83 lbs.


-

-

H-sync: 15-80 kHz

V-sync: 43-85 Hz

62 fL / max. 389 cm screen width

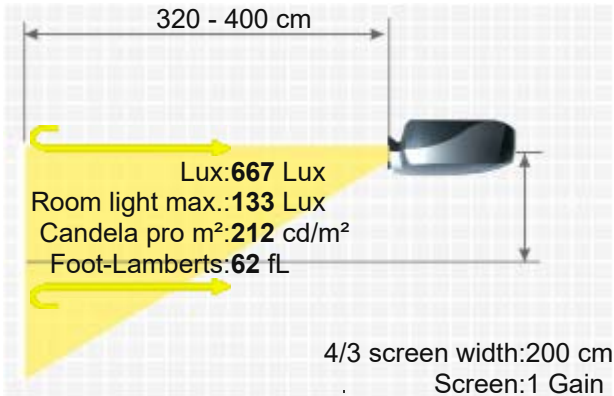

P R O L I G H T P L F 8 8 0 B S

212 cd/m²

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/prolightPLF880BS-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.