

# Proxima Pro AV 9400/L



PROXIMA PRO AV 9400/L



The Pro AV 9400/L LCD projector from Proxima has 2300 Ansi lumens, a contrast of 350:1 and an SXGA 1280 x 1024 resolution. With the lens shift function, the projector can be positioned very freely. The projector will be able to illuminate a picture width of 406 cm well. However, if room light is available, the picture width should ideally not exceed 271 cm. This model is no longer offered by Proxima, but is still very popular in our projector database.

3 x 1,8" LCD TFT Panel mit MLA  
SXGA 5/4 Liquid Crystal Display with Micro Lense Array

2300  
350:1 full on/off  
6,5714 min. Lumen  
Vert.: +/-50%  
SXGA 1280 x 1024  
1.310.720 Pixel

698 Lux (bei 203 cm Screen)  
350:1 full on/off  
2.013 min. Lumen

NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM  
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

400W Metalldampf Lamp

Articel Nr.: LAMP-018

750 h.

-

-

Powered

Powered 1,29

F=2,0-2,3 f=75,7-97,5 mm

2,12-2,73:1

2 x 3W Stereo

Input • 2 computer input channels Channel 1: RGB (HDI5) / DFP (Digital PanelLink Interface) Channel 2: BNC (R, G, B, H, V) Each channel includes: RCA type stereo audio (R, L-mono), Maus control port, USB port • 2 video input channels Each channel includes: 3 BNC (for component (R-Y, B-Y, Y) und composite) 1 mini DIN 4-pin (for S-Video) 1 RCA type stereo audio (R, L-mono)

Output • 1 monitor output HD15 + RCA type stereo audio (R, L-mono) • 1 video output 3 BNC (for component und composite) 1 mini DIN 4-pin (for S-Video) 1 RCA type stereo audio (R, L-mono) Control Input Sources • RS232C (DB9)

Yes

650W


390 x 233 x 582 mm (15,4"x9,2"x22,9") 52,89 L/dm³

42dB

17,80 kg / 39,24 lbs.

-

85%

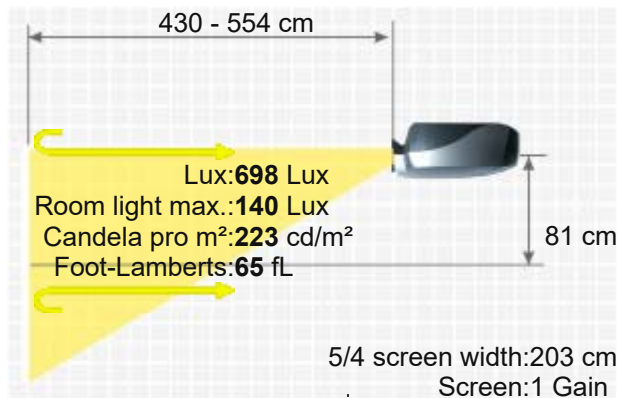

Frequenz H-sync: 15-100 kHz  
V-sync: 50-100 Hz

Foot-Lamberts 65 fL / max. 406 cm screen width

223 cd/m²

- Features
- Lens shift Funktion
  - Freeze
  - Remote control with laser pointer und mouse control
  - Crestron®-Software compatible.
  - Digital Zoom
  - Lens Shift +/- 12°



| Optional Lenses      |             |            |         |         |         |
|----------------------|-------------|------------|---------|---------|---------|
| Name                 | Ratio       | Distance   | Shift V | Shift H | Zoom    |
| Zoom Optional Lenses |             |            |         |         |         |
| Proxima LENS-018     | 2.6-3.5:1   | 5.3-7.1 m  | +/-50%  |         | Powered |
| Proxima LENS-011     | 4.6-6:1     | 9.3-12.2 m | +/-40%  |         | Powered |
| Proxima LENS-005     | 2.07-2.67:1 | 4.2-5.4 m  | +/-50%  |         | Powered |
| Proxima LENS-004     | 3.4-4.5:1   | 6.9-9.1 m  | +/-40%  |         | Powered |
| Proxima LENS-003     | 1.8-2.9:1   | 3.7-5.9 m  | +/-50%  |         | Powered |
| Fix Optional Lenses  |             |            |         |         |         |
| Proxima LENS-019     | 0.8:1       | 1.6 m      | +/-0.0% |         | No Zoom |
| Proxima LENS-002     | 6.9:1       | 14 m       | +/-40%  |         | No Zoom |
| Proxima LENS-001     | 1.2:1       | 2.4 m      | +/-40%  |         | No Zoom |

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/proximaproav9400-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.