

Proxima PRO AV 9550



PROXIMA PRO AV 9550



Brief Introduction

Beta 2.5

The Proxima PRO AV 9550 LCD projector has 5800 Ansi lumens, a contrast of 600:1 and an SXGA 1280 x 1024 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 645 cm is possible, if the image width is smaller (we recommend max. 430 cm), rooms with residual light are also no problem. The model is no longer offered by Proxima, but is still very popular in our projector database.



3 x 1,8" LCD TFT Panel mit MLA

SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

5800 / 2900 im singel lamp Mode

1759 Lux (bei 203 cm Screen)

Contrast

600:1 full on/off

600:1 full on/off

Black Level

9,6667 min. Lumen

2.948 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

SXGA 1280 x 1024

1.310.720 Pixel

Video Modes

NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 200W UHP Lamp

Articel Nr.: SP-LAMP-004

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,29

Objective

F=2,0-2,3 f=75,7-97,5 mm

Throw Ratio

2,12-2,73:1

Audio

2 x 3W

Connections

• Input 1 (Modular): DVI-I, Audio in, Maus control; Input 2 (Modular): 5xBNC (RGBHV, RGBS, RGB,YPbPr, YCbCr), Audio in, Maus control; Input 3 (Modular): 2xBNC (Composite, Y, C video),S-video,Audio in

Ceiling Mounting

Yes

Power

900W

Size WxHxD

439 x 227 x 604 mm (17,3"x8,9"x23,8") 60,19 L/dm³

Operating Noise

45dB

Weight

20,50 kg / 45,19 lbs.

Keystone

Vert.: +/-30°

Illumination

85%

Frequenz

H-sync: 15-120 kHz


V-sync: 50-120 Hz

Range max.: 230 MHz

Foot-Lamberts

163 fL / max. 645 cm screen width

558 cd/m²

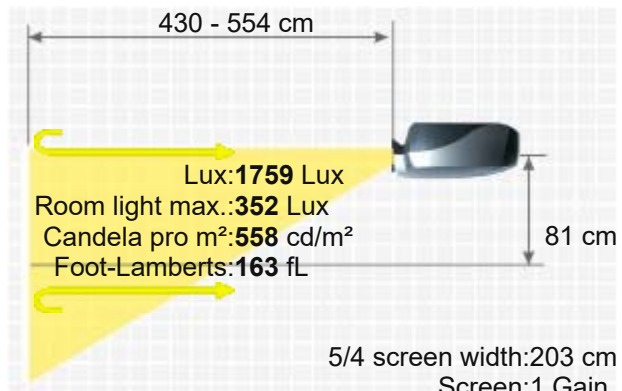

- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Gamma correction
- Remote control with laser pointer und mouse control
- Crestron®-Software compatible.
- digital zoom
- Faroudja De-interlacer

Bulb only Philips	NLMP3164
Single lamp ruby	Ruby-LMP3164
Single lamp original	SP-LAMP-004
Universal Remote original	Fernb-uni-V3
Remote control original	645 047 7867 / CXJT
Air filter A bottom original	910 292 3163
Air filter C left original	910 292 3187

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16060>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Proxima LENS-018	2.6-3.5:1	5.3-7.1 m	+/-50%		Powered
Proxima LENS-011	4.6-6:1	9.3-12.2 m	+/-40%		Powered
Proxima LENS-005	2.07-2.67:1	4.2-5.4 m	+/-50%		Powered
Proxima LENS-004	3.4-4.5:1	6.9-9.1 m	+/-40%		Powered
Proxima LENS-003	1.8-2.9:1	3.7-5.9 m	+/-50%		Powered
Fix Optional Lenses					
Proxima LENS-019	0.8:1	1.6 m	+/-0.0%		No Zoom
Proxima LENS-002	6.9:1	14 m	+/-40%		No Zoom
Proxima LENS-001	1.2:1	2.4 m	+/-40%		No Zoom

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/proximaproav9550-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.