

RICOH
imagine. change.

Ricoh PJ S2130/ PJ WX2130

Business Projection Systems



Projection
brightness up to
2,800lm

Connectivity
HDMI

Ready
3D

See the value of portable, convenient projection

Stay focused and keep your business moving forward with high-quality presentations that engage audiences without straining your budget. Choose the compact RICOH® PJ S2130/PJ WX2130 to bring presentations, videos, and movies to life in small classrooms and conference rooms. This entry-level system combines innovative image projection technology, easy-to-use functionality and convenient flexibility for exceptional value in a portable, lightweight design. Add it to your fleet of business communication systems with confidence — knowing it's backed by world-class service and support from a partner you can trust.

Convenient control on the go

The lightweight Ricoh PJ S2130/PJ WX2130 is designed specifically for easy transport and presenting in unpredictable locations. Control key functions directly on the projector using the control panel, or grab the remote control and adjust volume, screen size, playback, pause and other key functionality with one-touch operation from anywhere in the room. Users can fine-tune images via the focus lever on the top of the projector. The system runs quietly, with minimal heat, and has a 4,000-hour lamp life when operating in Eco Mode for reliable performance with minimal maintenance.

Present with more clarity

Enhance the user experience with cutting-edge Digital Light Processing (DLP) technology. It provides crisp, clear images in vibrant colors and presents videos and movies in high definition. Field sequential 3D images can be viewed using the optional 3D glasses for conventional 3D applications through an external converter. Its impressive brightness rating — up to 2,800 lumens — ensures that every presentation is presented with exceptional clarity for optimal impact in virtually any light. The Ricoh PJ S2130/PJ WX2130 includes 2 watt speakers for clear audio without external equipment and runs quietly with a noise level below 37 dB (32 dB in Economy Mode).

Partner with a proven leader

The Ricoh PJ S2130/PJ WX2130 is the latest innovation that leverages Ricoh's legacy of precision optics and lens technology. Add it to your fleet of copiers, printers, and MFPs and receive exceptional single-source support from a proven, experienced industry leader.

System Specifications

Projector

PJ S2130	Part # 403042
PJ WX2130	Part # 431036
Replacement Lamp*	Part # 308883
3D Glasses Type 1**	Part # 308884
Projection System	Single Chip DLP® system
Resolution	PJ S2130 – SVGA – 800 x 600 dpi PJ WX2130 – WXGA – 1280 x 800 dpi
Liquid Crystal Panel	Size: PJ S2130 – 0.55"; PJ WX2130 – 0.65"
Aspect Ratio	PJ S2130 – 4:3; PJ WX2130 – 16:10
White Light Output (Brightness)	2,800 lm
Contrast Ratio	2200:1
Screen Size/Projection Distance	PJ S2130 – 30" – 300"/47" – 516" PJ WX2130 – 30" – 300"/39" – 432"
Lamp Type	High pressure mercury (200W)
Lamp Life	Standard Mode: 3,000 hours Economy Mode: 4,000 hours
Projection Lens	Zoom Ratio: 1.1 Zoom/Focus: Manual/Manual
Interface	Computer Input: Mini D-sub 15 pin x 1 Monitor Output: Mini D-sub 15 x 1 Video Input: RCA pin jack x 1 S-Video: Mini DIN 4 pin x 1; HDMI x 1 Video Output: N/A Audio Input: Mini jack x 1 Audio Output: N/A USB: USB Type B for Control Use Wired LAN: N/A Wireless LAN: N/A
Projector Features	Keystone (Direction: Vertical; Auto/Manual: Manual); Digital Zoom (magnify); AV Mute; Freeze; Front/Rear Tilt Foot; High Altitude Mode
Built-in Speaker	2W Mono
Dimensions (WxDxH)	11.3" x 8.2" x 3.9" (286 x 208 x 100 mm)
Weight	5.5 lbs. (2.5 kg)
Power Consumption	While Operating: Standard Mode: 258W Eco Mode: 203W Standby On: 1.2W Standby Off: 0.5W
Storage & Transportation Environment	Temperature: -4°F to 140°F; Humidity: 80%
Fan Noise	Standard Mode: 37 dB Eco Mode: 32 dB
Power Supply	100/240V; 50 – 60Hz
Accessories Packaged with Projector	Cables: Single RGB Cable CD ROM: Operating Instructions; Safety Instructions; Quick Reference Guide; Warranty Sheet (US only) Carrying Case: Included Remote Control: Remote Control (AA x 2 Batteries Included)

*Lamps are consumable products and therefore are not covered by the projector's warranty.


**Native support for Frame Sequential 3D format. Other sources may require a converter that is not provided from Ricoh.

For maximum performance and yield, we recommend using genuine Ricoh parts and supplies.

Warranty


The Ricoh PJ S2130/PJ WX2130 is under warranty against defects for a period of two years from the date of purchase. Consumables are under warranty for a period of 90 days from the date of purchase or until depleted, whichever comes first. Please refer to warranty documents shipped with the product for more details.

Interface Terminal

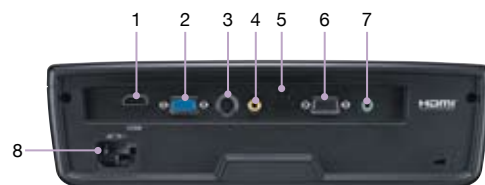

- 1 : HDMI terminal
- 2 : Computer In
- 3 : S- Video In
- 4 : Video In
- 5 : Service Use Port
- 6 : Monitor Out
- 7 : Audio In
- 8 : AC In

Remote Control



- 1 : Power
- 2 : Enter
- 3 : Menu
- 4 : AV Mute
- 5 : Input
- 6 : Auto Set
- 7 : Freeze
- 8 : Eco
- 9 : Zoom Out/In

RICOH
imagine. change.

www.ricoh-usa.com

Ricoh Americas Corporation, Five Dedrick Place, West Caldwell, NJ 07006, 1-800-63-RICOH
Ricoh® and the Ricoh Logo are registered trademarks of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. ©2012 Ricoh Americas Corporation. All rights reserved. The content of this document, and the appearance, features and specifications of Ricoh products and services are subject to change from time to time without notice. Products are shown with optional features. While care has been taken to ensure the accuracy of this information, Ricoh makes no representation or warranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Ricoh products and services are as set forth in the express warranty statements accompanying them.

R3390

