

Roverlight Aurora DX3500 PRO

ROVERLIGHT AURORA DX3500 PRO



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The standard portable Roverlight Aurora DX3500 PRO DLP projector has 3500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. It came onto the market in 2006 and is no longer offered by the manufacturer Roverlight.



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

3500
2000:1 full on/off
1,7500 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)
2000:1 full on/off
0,584 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600x1200 compressed

PAL-M, PAL-N, PAL-60, SECAM, NTSC,

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

250W UHP Lamp

Articel Nr.: SP.83601.001

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,2

F=2,4-2,6 f=28-33,6 mm

2,0-2,4:1

2 x 2W

DVI-I HDCP

YUV in

D-sub 15pin in


Cinch Video in

S-Video in

USB

RS232C

Mini Jack in und out

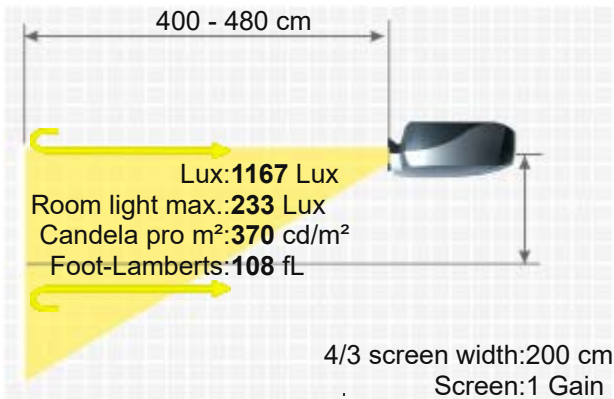



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
360W / 20W standby
340 x 127 x 260 mm (13,4"x5"x10,2") 11,23 L/dm³
32 / 28 dB in Eco Mode

Weight
Keystone
Illumination

3,40 kg / 7,5 lbs.
Vert.: +/-16°
85%

Frequenz

H-sync: 31,5-100 kHz
V-sync: 43-120 Hz

Foot-Lamberts

108 fL / max. 515 cm screen width
370 cd/m²


Features

- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Picture-in-Picture
- Remote control with laser pointer
-

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

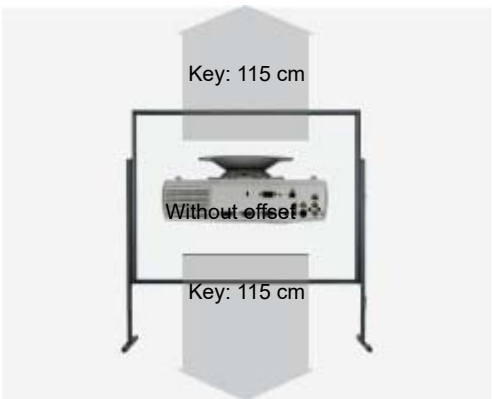

More Details



HCinema

<https://www.projector-database.com/pro/roverlightAuroraDX3500PRO-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.