

Roverlight Spark LX2000



ROVERLIGHT SPARK LX2000

Brief Introduction

Beta 2.5

Display Type



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2000

647 Lux (bei 203 cm Screen)

Contrast

450:1 full on/off

450:1 full on/off

Black Level

4,4444 min. Lumen

1.448 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

165W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,23

Objective

F=1,7-2,1 f=26-32 mm

Throw Ratio

1,83-2,25:1

Audio

1 x 2W

Connections

D-sub 15pin in und out
S-Video in
Cinch Video in
Cinch Stereo in
USB in



Ceiling Mounting

Yes

Power


-

Size WxHxD

225 x 87 x 305 mm (8,9"x3,4"x12") 5,97 L/dm³

Operating Noise

-

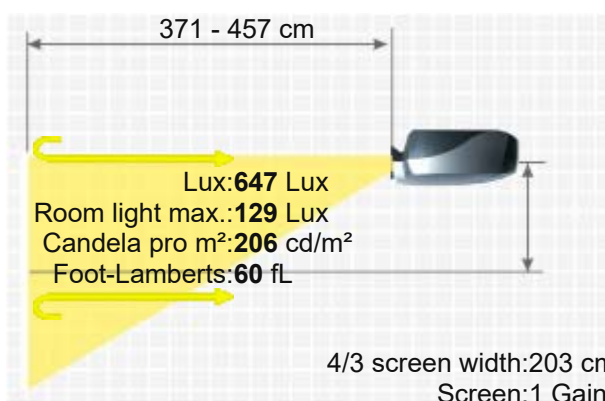

Weight	-
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	60 fL / max. 389 cm screen width 206 cd/m²
Features	-
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/roverlightsparklx2000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.