Runco LS 10d

Lens Shift | Motor | W.-Optiken

Brief Introduction Beta 2.5	The LS 10d DLP has 2100 Ansi-Lumen, a contrast of 10000:1 and a HDTV 1920 x 1080 resolution. Including a lens shift function, which provides freedom during installation. A picture width of up to 466 cm is possible. However, the image should be smaller in room light. We recommend max. 311 cm. Even 1080P video signals are no problem for the projector. On the market since 2010, the model is no longer offered by the manufacturer Runco, but is still very popular in our projector database.
Display Type	3 x DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2100 / Screen: 933 Lux (bei 200 cm Screen)
Contrast	Projector: 10000:1 full on/off / Screen: 10000:1 full on/off
Black Level	Projector: 0,2100 min. Lumen / Screen: 0,093 min. Lumen
Lens shift	Vert.: +/-65% Hori.: +/-30%
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Medium screen width or rooms with little light, max. 100 lumens.
Light Source	260 / 230W im Eco Mode Lamp Article Nr.: 997-5353-00
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Powered
Zoom	Powered
Objective	optional
Throw Ratio	optional
Audio	Nein
Connections	Über Externen Videoprozessor.
Ceiling Mounting	Yes, is possible.
Power	400W
Size WxHxD	519 x 225 x 643 mm (20,4"x8,9"x25,3") 75,09 L/dm³
Operating Noise	-
Weight	18,50 kg / 40,79 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	87 fL / max. 466 cm screen width 298 cd/m²

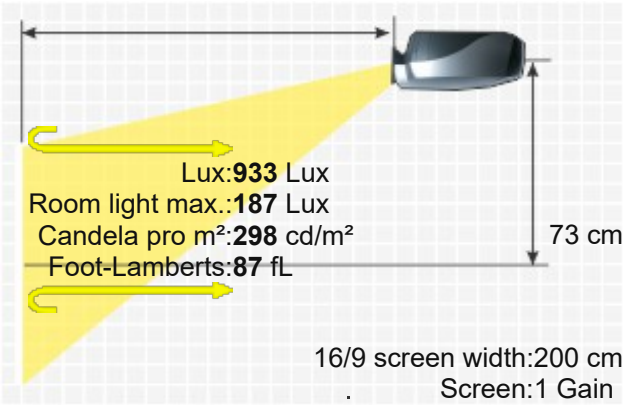

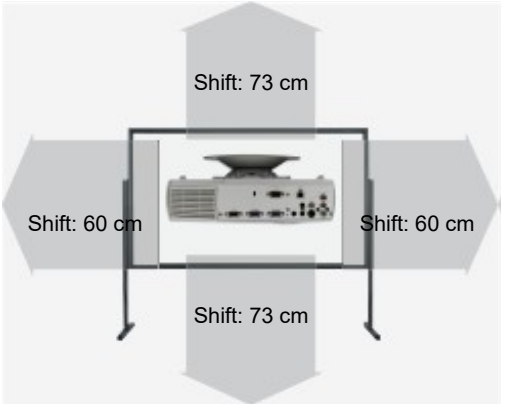

RUNCO LS 10D

Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ Gamma correction ■ Dynamic iris ■ Password protection ■ Overscan adjustable ■ External video processor included.
Screen Mirroring	-

Optional accessories

	Nackte Osram Lampe	NLMP18352	113,74 €
	Lampe Ruby	Ruby-LMP18352	201,94 €
	Lampe Original	997-5353-00	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
4.34 - 6.76:1	4.34-6.76:1	8.7-13.5 m	+/-65%	+/-30%	Powered
2.90 - 4.34:1	2.9-4.34:1	5.8-8.7 m	+/-65%	+/-30%	Powered
2.17 - 2.90:1	2.17-2.9:1	4.3-5.8 m	+/-65%	+/-30%	Powered
1.74 - 2.17:1	1.74-2.17:1	3.5-4.3 m	+/-65%	+/-30%	Powered
1.45 - 1.74:1	1.45-1.74:1	2.9-3.5 m	+/-65%	+/-30%	Powered
Fix Optional Lenses					
0.77:1	0.77:1	1.5 m	0.0% Fix		No Zoom

Status Data	2010 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details

HCinema

https://www.projector-database.com/pro/runcols10d-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.