

Salora 60BFM4250

SALORA 60BFM4250



The 60BFM4250 LED LCD projector from Salora has 400 Ansi lumens, a contrast of 2500:1 and an HDTV 1920 x 1080 resolution. The manufacturer specifies an LED service life of 30,000 hours, which is over 20.5 years with a daily viewing time of 4 hours. The projector can illuminate a picture width of up to 203 cm well thanks to its 400 Ansi lumens. In room light, however, the picture width should ideally be less than 135 cm. As the projector optionally recognizes Airplay and Miracast screen mirroring signals, it is possible to play videos with a high resolution and surround sound directly from a smartphone, tablet or PC (Android, Windows and iOS) via Wi-Fi. Even 1080P video signals are no problem for the projector.

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

1 x 5,8" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Projector 400

2500:1 full on/off

0,1600 min. Lumen

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

LED

30000 h.

0,00 € LED

Manual

No Zoom

-

-


2 x 10W

HDMI in
2x USB-A in
S/PDIF
Audio Mini Jack in

Screen 178 Lux (bei 200 cm Screen)

2500:1 full on/off

0,071 min. Lumen

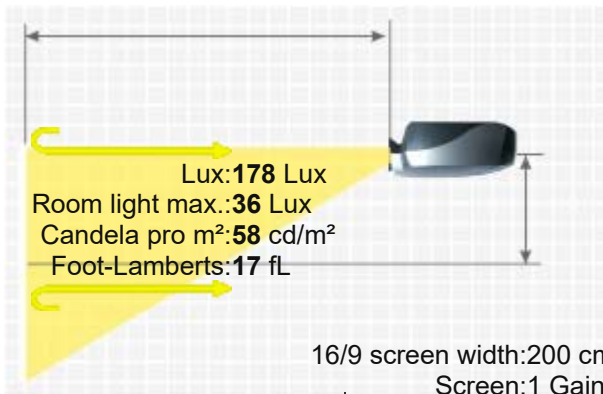



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
130W
295 x 90 x 245 mm (11,6"x3,5"x9,6") 6,5 L/dm³
-

Weight
Keystone
Illumination

-
-
-

Frequenz

-

Foot-Lamberts

17 fL / max. 203 cm screen width
58 cd/m²

Features

■ Full HD 1080P compatible

Status

2020 Current model // Last update of the data: 2024-10-02

Data



More Details



HCinema

<https://www.projector-database.com/pro/salora60bfm4250-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.