

Sanyo PLC 750ME



Brief Introduction

Beta 2.5

A brief introduction to the PLC 750ME: The Sanyo stationary LCD projector offers 1000 Ansi lumens, a contrast of 100:1 and a VGA 640x480 resolution. An image width of up to 275 cm is possible. However, the image should be smaller in room light. We recommend max. 183 cm. This model is no longer offered by Sanyo. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.



3 x 3,1" LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

1000
100:1 full on/off
10,0000 min. Lumen
324 Lux (bei 203 cm Screen)
100:1 full on/off
3.34 min. Lumen

Resolution
Video Modes

VGA 640x480
307.200 Pixel
PAL, NTSC

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Small screen width, rooms with very little ambient light below 100 lumens.

Light Source
Light Life

400W Metaldampf Lamp
Articel Nr.: 610 259 5291
2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,6

Objective

F=3,8-4,8 f=115-185 mm

Throw Ratio

1,83-2,94:1

Audio

-

Connections

Cinch Video in
Mini Jack in
RS232C
5 x BNC in
BNC Video in
S-Video in
Cinch Stereo in

Ceiling Mounting
Power

-
630W

Size WxHxD

337,5 x 394 x 594 mm (13,3"x15,5"x23,4") 78,87 L/dm³

Operating Noise

-

Weight


23,50 kg / 51,81 lbs.

Keystone

-

Illumination

-

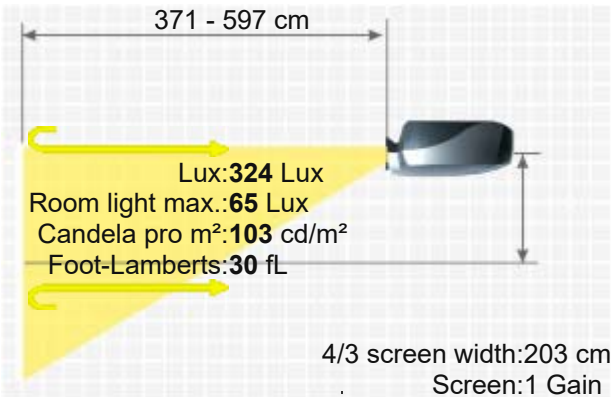

SANYO PLC 750ME

Frequenz	H-sync: 15-37,9 kHz V-sync: 50-70 Hz
Foot-Lamberts	30 fL / max. 275 cm screen width 103 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/sanyopl750me-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.