

Sanyo PLC XM100/L

SANYO PLC XM100/L



A brief introduction to the PLC XM100/L: The Sanyo stationary LCD projector offers 5000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 5000 Ansi lumens, an image width of 616 cm is possible. The projector can also handle slightly brighter rooms with a narrower image width (we recommend max. 411 cm). It is also Full HD 1080P compatible. The model built in 2009 is no longer offered by Sanyo, but is still a popular projector in our database.



3 x 0,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

5000

1000:1 full on/off

5,0000 min. Lumen

Vert.: +/-50% Hori.: +/-10%

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

275W Lamp

Articel Nr.: 610-347-5158 / LMP137

2000 h. 3000 h. in eco Mode

-

Powered

Powered 1,69

F=1,8-2,3 f=26,9-45,4 mm / L optional

1,70-2,89:1


7W Mono

DVI in
5 x BNC RGBHC in
D-sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in und out

1667 Lux (bei 200 cm Screen)

1000:1 full on/off

1,672 min. Lumen

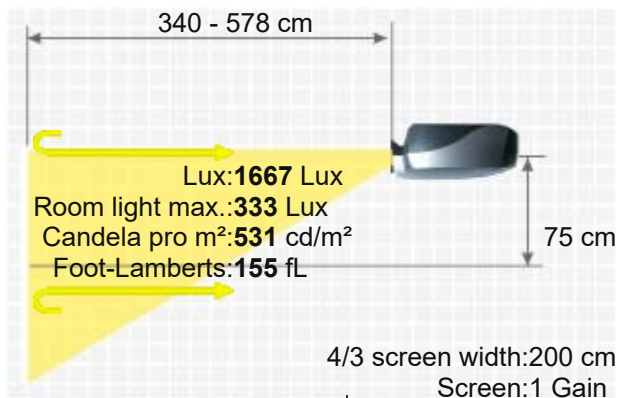

USB
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
490W
489,5 x 164 x 434,8 mm (19,3"x6,5"x17,1") 34,81 L/dm³
31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

9,70 kg / 21,38 lbs.
Vert.: +/-40°
Hori.: +/-20°
90%
H-sync: 15-100 kHz
V-sync: 48-100 Hz
Range max.: 140 MHz
155 fL / max. 616 cm screen width
531 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with mouse control
- PJLink™
- Control via web browser
- Lan network compatible.
-

Optional

- Bulb only NLMP19457
- Lamp ruby Ruby-LMP19457
- Lamp original 610-347-5158 / LMP137 / ET-SLMP137
- Compatible lamp LMP-K19361
- Universal Remote original Fernb-uni-V3
- Air filter compatible Alternative zu:POA-FIL-080 / 610-346-9034 / ET-SFYL080
- Remote control original 645 097 4069 / CXZH
- Air filter original POA-FIL-080 / 610-346-9034 / ET-SFYL080
- Ceiling Mount 100-120 Halterung100


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19361>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W20	1.25-1.7:1	2.5-3.4 m	+/-50%	+/-10%	Powered
LNS-T21	4.6-7.36:1	9.2-14.7 m	+/-50%	+/-10%	Powered
LNS-T20	2.89-4.6:1	5.8-9.2 m	+/-50%	+/-10%	Powered
LNS-S20	1.7-2.89:1	3.4-5.8 m	+/-50%	+/-10%	Powered
Fix Optional Lenses					
LNS-W21	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

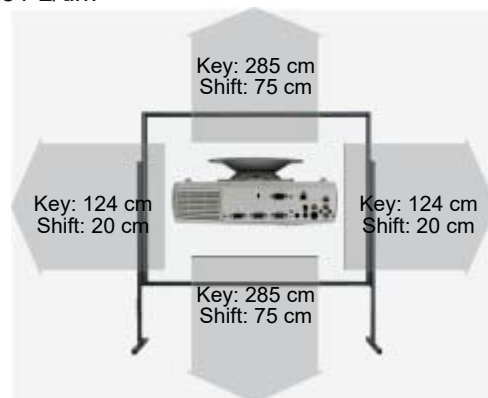



HCinema

<https://www.projector-database.com/pro/sanyoplcxm100-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.