

Sanyo PLC XT25/L

SANYO PLC XT25/L



Brief Introduction

Beta 2.5

The Sanyo model PLC XT25/L is an LCD projector with XGA 1024 x 768 resolution and a contrast of 1000:1. The projector also offers a lens shift function, which makes setting up the image childs play. An image width of up to 584 cm is possible, if the image width is smaller (we recommend max. 389 cm), rooms with residual light are also no problem. This model is no longer offered by Sanyo.

Display Type



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

4500

1500 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

4,5000 min. Lumen

1,505 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-15% motorisiert

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

300W UHP Lamp

Articel Nr.: 610-330-7329 / LMP105

Light Life

1500 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,9-2,1 f=33-43 mm / L optional

Throw Ratio


1,62-2,11:1


Audio

1W Stereo

Connections

DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 8pin in
USB Typ B

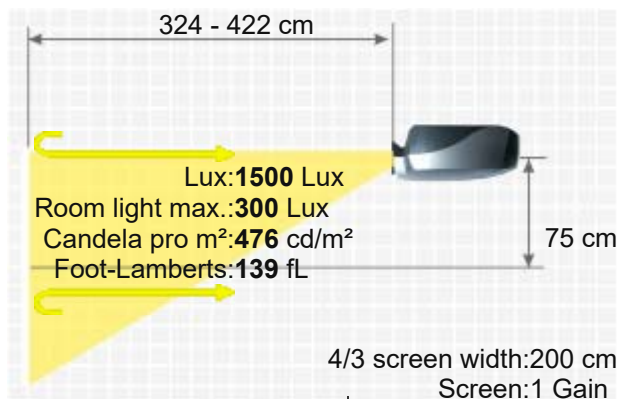

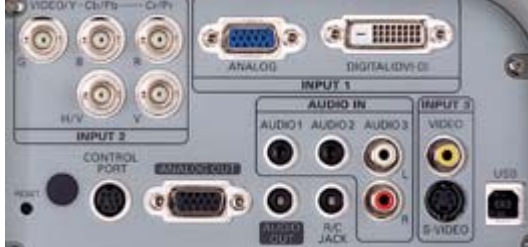


Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
430W
348 x 156,5 x 444 mm (13,7"x6,2"x17,5") 24,1 L/dm³
30 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

10,00 kg / 22,05 lbs.
Vert. +40°-20°
Hori.: +/-10°
85%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 100 MHz
139 fL / max. 584 cm screen width
476 cd/m²

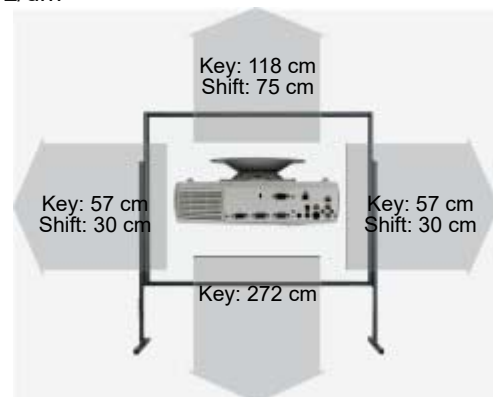

Features

- Lens shift Funktion motorisiert
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer
- Optional LAN network compatible.
- Digital Zoom.
- Automatic display of air pollution.
- Vertical operation possible (up to 90°).
- De-interlacer with 3:2 2:2 pull down.

Optional

Bulb only NLMP16004
Lamp ruby Ruby-LMP16004
Lamp original 610-330-7329 / LMP105 / ET-SLMP105
Compatible lamp LMP-K16004
Universal Remote original Fernb-uni-V3
Air filter compatible Alternative zu: MZ7A / 910 330 7184
Remote control original 9450871468 / CXTK
Air filter original MZ7A / 910 330 7184
Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16005>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W10	1.24-1.63:1	2.5-3.3 m	50%	+/-15%	Powered
LNS-T11	3.43-5.43:1	6.9-10.9 m	50%	+/-15%	Powered
LNS-T10	2.13-3.46:1	4.3-6.9 m	50%		Powered
Fix Optional Lenses					
LNS-W11	0.82:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2006 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/sanyoplctx25-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.