

Sharp XG E1200E/U

SHARP XG E1200E/U



Brief Introduction

Beta 2.5

The XG E1200E/U LCD projector from Sharp has 600 Ansi lumens, a contrast of 100:1 and an SVGA 800 x 600 resolution. 600 Ansi lumens ensure that a picture width of 213 cm is also possible. However, if room light is available, the picture should be max. 142 cm wide. This model is no longer offered by Sharp. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.



3 x 1,3" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

600

194 Lux (bei 203 cm Screen)

Contrast

100:1 full on/off

100:1 full on/off

Black Level

6,0000 min. Lumen

2 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

370W Metalldampf Lamp

Articel Nr.: BQC-XGE1200U1

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,61

Objective

F=2,5-3,5 f=66-106 mm

Throw Ratio

2,5-4,01:1

Audio

2 x 3W 8 cmØ

5 x BNC RGBHV

Cinch Stereo in

S-Video in

D-sub 15pin in und out

RS232C

Mini Jack in

Connections



Ceiling Mounting

-

Power


520W

Size WxHxD

359 x 208 x 585 mm (14,1"x8,2"x23") 43,68 L/dm³

Operating Noise

-

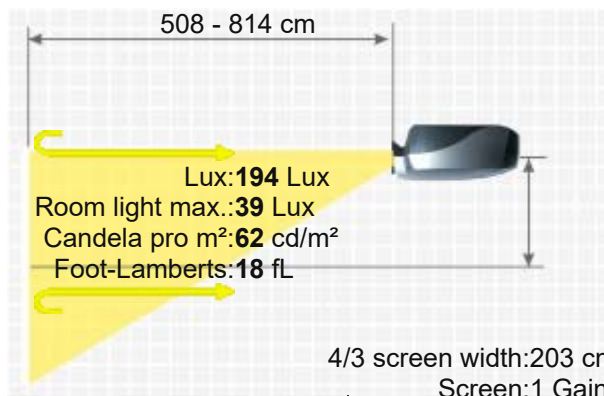

Weight	16,50 kg / 36,38 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 24,0-60,0 kHz V-sync: 50-75 Hz
Foot-Lamberts	18 fL / max. 213 cm screen width 62 cd/m²
Features	■ Remote control with laser pointer und mouse control -
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/sharpxge1200u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.