

Sony SRX R815DS

SONY SRX R815DS



The Sony SRX R815DS E-Cinema 3D Laser SXR projector has 30000 Ansi-Lumen, a contrast of 10000:1 and a UHD (4K+2K) 4096 x 2160 resolution. It is a laser projector with 35000 hours of light life, which is over 24 years if enjoyed for four hours a day. The projector can illuminate a screen width of up to 813 cm thanks to its 30000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 542 cm. Furthermore, the projector can play 1080P and 4K as well as 3D without any problems, meaning that all currently available Blu-ray formats can be recognized by the projector. The projector was launched in 2017 and is no longer sold by the manufacturer, but is still very popular in our projector database.

2 x 3 x 1,48" SXR Panel

UHD 19/10 Silicon X-tal Reflective Display (SXR)

Projector	30000	Screen	14222 Lux (bei 200 cm Screen)
Contrast	10000:1 full on/off		10000:1 full on/off
Black Level Offset	3,0000 min. Lumen		1,423 min. Lumen

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

35000 h.

0,00 € Laser

Powered

Powered

optional

optional

Nein

2 x HDMI in


1 x CRU Data Port Slot

1 x RS232C

Asymmetrisch, 8 Kanäle, 24 Bit, 48/96 kHz, lineares PCM, D-Sub, 25-polig (Buchse) (1)

AES/EBU, 16 Kanäle, 24 Bit, 48/96 kHz, lineares PCM, D-Sub, 25-polig (Buchse) (1)

No, is not possible.

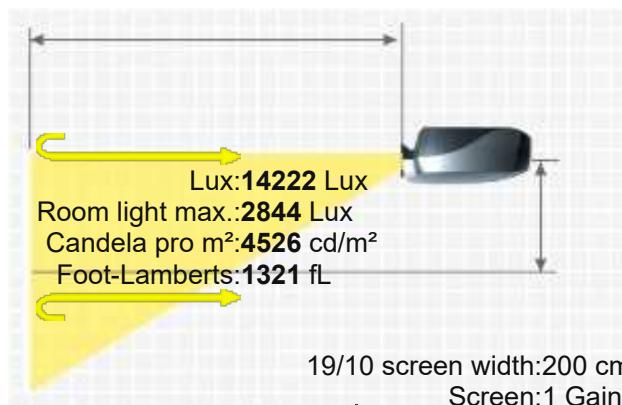

Power -
Size WxHxD 1088 x 827 x 1239 mm (42,8"x32,6"x48,8") 1114,82 L/dm³
Operating Noise -

Weight 230,00 kg / 507,06 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 1321 fL / max. 813 cm screen width
4526 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - High Dynamic Range (HDR)
 - Combination of two SRX-R815 projectors

Screen Mirroring -

Name	Ratio	Optional Lenses			Zoom
		Distance	Shift V	Shift H	
		Zoom Optional Lenses			
LKRL-Z519	1.9-4:1	3.8-8 m			Powered
LKRL-Z514	1.35-2.34:1	2.7-4.7 m			Powered
LKRL-Z511	1.05-1.75:1	2.1-3.5 m			Powered

Status 2017 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2017-08-31 19:42:29



More Details



HCinema

<https://www.projector-database.com/pro/sonysrxr815ds-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.