

Sony VPL S500E/U/M



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Sony VPL S500E/U/M LCD projector has 450 Ansi lumens and an SVGA 832 x 624 resolution. An image width of up to 185 cm is possible as the projector has 450 Ansi lumens. However, if room light is available, the picture should be max. 123 cm wide. It is no longer offered by the manufacturer Sony. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.



3 x 1,3" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector

450
-
-

Screen

150 Lux (200 cm Screen width)
-
-

SVGA 832 x 624
1557504 Pixel

XGA 1024 x 768 compressed

PAL, NTSC 3,58, NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

250W Metalldampf Lamp

Article Nr.: PKPJ-500

3000 h.

-

Manual

Manual 1,5

F=2,5-3,1 f=50-75 mm

1,89-2,84:1

2 x 0,2W

S-Video

2 x Mini Jaxk in

Cinch Stereo in

1 x BNC Video in

D-sub 15pin in

Yes, is possible.

350W 10W standby


368 x 176 x 444 mm (14,5"x6,9"x17,5") 28,76 L/dm³

-

10,00 kg / 22,05 lbs.

-

-

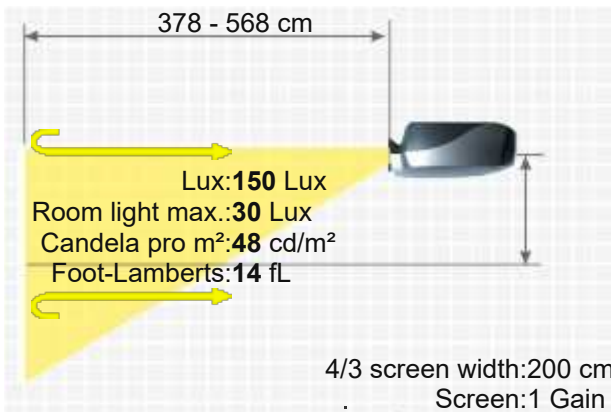

Frequenz	H-sync: 15,24-81 kHz V-sync: 43-85 Hz
Foot-Lamberts	14 fL / max. 185 cm screen width 48 cd/m²
Features	-
Screen Mirroring	-

Optional accessories

	Lampe Original	PKPJ-500	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status Data - Discontinued (EOL) // Last update of the data: 2026-06-09

More Details



HCinema

<https://www.projector-database.com/pro/sonyvpls500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.