Specktron XL 328



The Specktron XL 328 LCD projector has 2800 Ansi lumens, a contrast of 1600:1 and an XGA 1024 x 768 resolution. The lamp life is specified by the manufacturer as 4000 hours, which

However, the picture should be smaller in room light. We recommend max. 307 cm. This model

ω933 Lux (bei 200 cm Screen)

converts to over 5.5 years at 2 hours per day. A picture width of up to 461 cm is possible.



Brief Introduction Beta 2.5

3 x 0,63" LCD TFT Panel Display Type XGA 4/3 Liquid Crystal Display

Projector

2800

XGA 1024 x 768

786.432 Pixel

presentations.

1,47-1,77:1

Cinch Video in

S-Video in

Yes

280W

1600:1 full on/off

1,7500 min. Lumen

Ansi-Lumen Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Zoom

Focus

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

Size WxHxD Operating Noise

D-sub 15pin in und out

RS232C Din 9 pin in

Weight 3,70 kg / 8,16 lbs. Keystone Vert.: +/-30° Illumination 80%

H-sync: 15-100 kHz Frequenz V-sync: 48-85 Hz

Foot-Lamberts 87 fL / max. 461 cm screen width

> 298 cd/m² Eco Mode

Features Status 2014 Discontinued (EOL) // Last update of the data: 2023-08-04 Data

ក្តី 1600:1 full on/off ១ 0,584 min. Lumen Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p Standard-Portabel | External training and company presentations, as well as product Medium screen width or rooms with little light, max. 100 lumens.


215W UHP Lamp 4000 h. 6000 h. in Eco Mode 294 - 354 cm Manual

is no longer offered by Specktron.

Manual 1,2 F=2,1-2,3 f=18,82-22,60 mm

Foot-Lamberts:87 fL



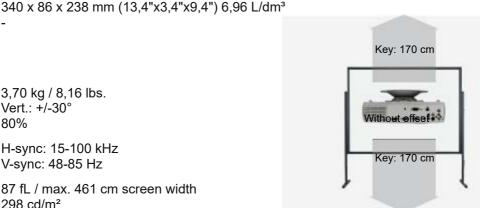

More Details



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.