

Telex P1200

TELEX P1200



Brief Introduction

Beta 2.5

The Telex model P1200 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 200:1. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. A picture width of up to 289 cm is possible. However, the image should be smaller in room light. We recommend max. 193 cm. It is no longer offered by the manufacturer Telex.

Display Type



3 x 1,3 LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1100

356 Lux (bei 203 cm Screen)

Contrast

200:1 full on/off

200:1 full on/off

Black Level

5,5000 min. Lumen

1.808 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, NTSC, Secam

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

120W UHP Lamp

Articel Nr.: UHP-1

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

-

Throw Ratio

-

Audio

-

Connections

Cinch Video in

S-Video in

D-sub 15pin in

Ceiling Mounting

-

Power

-

Size WxHxD

-

Operating Noise

-

Weight

-

Keystone

Vert.: +/-15°

Hori.: +/-10°

Illumination

80%

Frequenz

H-sync: 15-100 kHz

V-sync: 43-120 Hz

Range max.: 230 MHz

Foot-Lamberts

33 fL / max. 289 cm screen width

113 cd/m²


Features

-

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

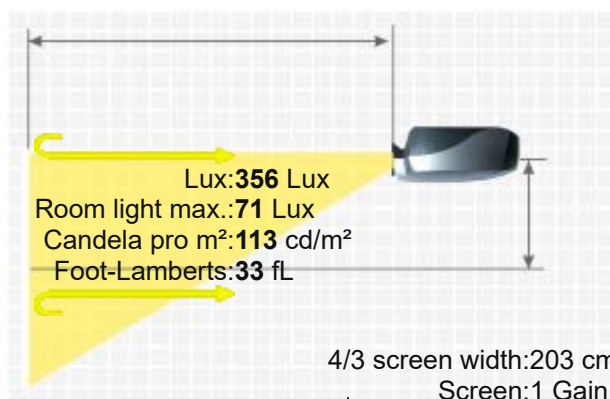

HCinema

<https://www.projector-database.com/pro/telexp1200-en.html>

More Details

