

TOSHIBA



Our camera model for presentations with special effect.

- High contrast: 2,000 : 1
- Camera: 629.856 pixel
- Manual zoom and focus

| **sc35**




DLP™ and the DLP™-Badge are registered trademarks of Texas Instruments.

sc35

For magnificent presentations of natural objects.

- Display** 0.55" DMD™ Chip
- Resolution** SVGA 800 x 600
- Brightness** 2,000 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 2,000 : 1
- Projection format** 4 : 3 switchable to 16 : 9
- Lamp** 180 W (TLPLV7LAMP)
- Max. lamp life** up to max. 3,000 hours/
up to max. 4,000 hours
- Lens** F = 2.0 - 2.15 / f = 19.40 - 22.5 mm, manual zoom and focus
- Zoom** 1.2 x
- Frequency (hor./vert.)** 15 - 93 kHz / 50 - 85 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** manual vertical
- Picture size (diagonal)** 0.76 m - 7.62 m
- Projection distance** 1.16 m - 10 m
- Input signals** NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)
- Inputs** 2 x RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (stereo mini jack), video audio (2 x RCA L/R)
- Outputs** RGB (D-sub 15), audio (mini jack)
- Serial interface** RS-232C (mini DIN8 pin)
- Power supply** AC 100 - 240 V, 50 / 60 Hz
- Loudspeaker** 1 W mono
- Dimensions (W x H x D)** 285 x 98 x 255 mm
- Weight** 3.9 kg
- Operation noise** standard 35 dB / ECO mode 32 dB
- Specials** ECO mode, 3 picture modes
- Accessories** remote control with batteries, owners manual (CD ROM), RGB- and power-cable, softcase, lens cap
- Options** ceiling mount, trolley, spare lamp
- Camera** 1 / 4.2" CCD, 629,856 pixel, F = 2.8 / f = 2.8 mm, manual zoom and focus

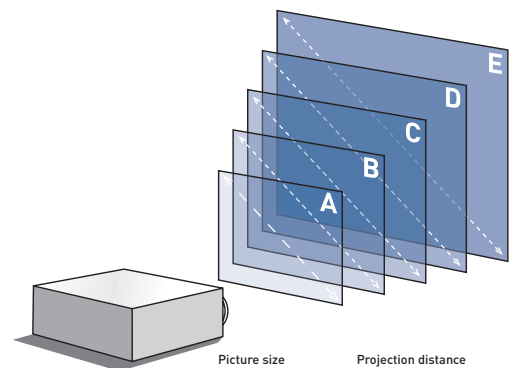

Picture size	Projection distance
A 1.02 m	1.4 - 1.62 m
B 1.52 m	2.1 - 2.44 m
C 2.54 m	3.5 - 4.06 m
D 3.81 m	5.25 - 6.09 m
E 6.35 m	8.75 - 10.15 m