

# UVISTAR UC40



## Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

Resolution

Video Modes

Application

Light Source  
Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

## Connections


Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Weight  
Keystone  
Illumination

## Frequenz

## Foot-Lamberts

The standard portable Uvistar UC40 LED LCD projector has 800 Ansi lumens, a contrast of 8001:1-10000:1 and a WVGA 800 x 480 resolution. The manufacturer specifies an LED service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. 800 Ansi lumens ensure that a picture width of 287 cm is also possible. However, if room light is available, the picture should be a maximum of 191 cm wide. It was launched in 2017 and is no longer offered by the manufacturer Uvistar.

 LCD TFT Panel  
WVGA 16/9 Liquid Crystal Display

Projector	800	Screen	356 Lux (bei 200 cm Screen)
	8001:1-10000:1		8001:1-10000:1
	0,0800 min. Lumen		0,045 min. Lumen

WVGA 800 x 480  
384.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p  
Standard-Portabel | External training and company presentations, as well as product presentations.  
Small screen width, rooms with very little ambient light below 100 lumens.

LED  
20000 h.

0,00 € LED

Manual

Manual x1,2

—

—

—

1x HDMI in  
USB in  
1x SD Card in  
IP  
IR

—

—

—


—

—

—

—

—

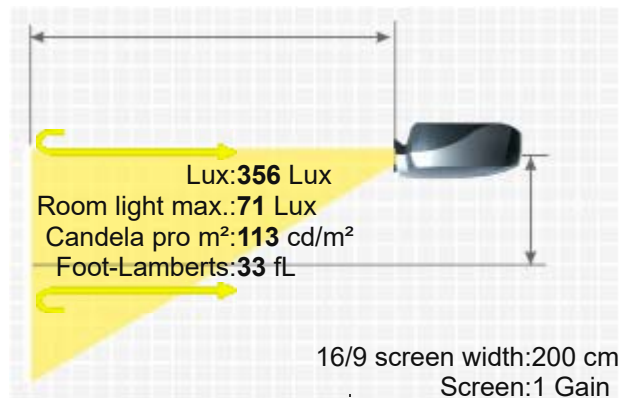

113 cd/m<sup>2</sup>

Features  
Status  
Data

-  
2017 Discontinued (EOL) // Last update of the data: 2023-08-04



# HCinema

<https://www.projector-database.com/pro/uvistarUC40-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.