

VDC MARQUEE HD SSL6000 Ultra



VDC MARQUEE HD SSL6000 ULTRA



Display Type	 DC DLP Chip HDTV 16/9 Ti Digital Light Processing Chip	
Ansi-Lumen	500	222 Lux (bei 200 cm Screen)
Contrast	500000:1 full on/off	500000:1 full on/off
Black Level Offset	0,0010 min. Lumen	0 min. Lumen
Resolution	HDTV 1920 x 1080 2.073.600 Pixel WUXGA 1920 x 1200 compressed	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p	
Application	Rear Projection Very narrow picture width and rooms with very little light.	
Light Source	LED	
Light Life	-	

Operating Costs 0,00 € LED


Focus Manual

Zoom Manual

Objective optional

Throw Ratio optional

Audio No

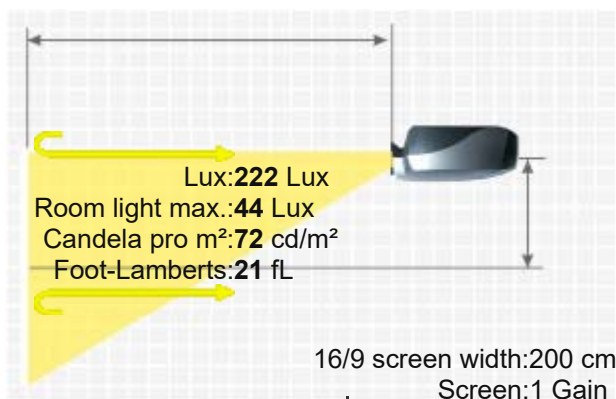

2 x HDMI in
YUV in
Cinch Video in
S-Video in
RS232C

Connections



Ceiling Mounting -

Power 260W

Size WxHxD 482,60 x 225,5 x 479,50 mm (19"x8,9"x18,9") 51,95 L/dm³

Operating Noise 28dB

Weight 14,50 kg / 31,97 lbs.

Keystone -

Illumination -

Frequenz -

Foot-Lamberts21 fL / max. 227 cm screen width

72 cd/m²

Features-

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
2,3-3,01:1	2.3-3:1	4.6-6 m	+/-60%	+/-15%	Manual
1,84-1,86:1	1.84-1.86:1	3.7-3.7 m	+/-60%	+/-15%	Manual
1,56-1,86:1	1.56-1.86:1	3.1-3.7 m	+/-60%	+/-15%	Manual
1,248-1,48:1	1.25-1.48:1	2.5-3 m	+/-60%	+/-15%	Manual
0,9-1,1:1	0.9-1.1:1	1.8-2.2 m	+/-60%	+/-15%	Manual
Fix Optional Lenses					
0,73:1	0.73:1	1.5 m	0.0% Fix		No Zoom

Status2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/vdcmarqueehdssl6000ultra-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.