

Vertex SD 210



VERTEX SD 210



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

The standard portable Vertex SD 210 DLP projector has 2800 Ansi lumens, a contrast of 2100:1 and an SVGA 800 x 600 resolution. Due to the brightness of 2800 Ansi lumens, a picture width of 461 cm is possible. In room light, the picture should be max. 307 cm wide. It is no longer offered by the manufacturer Vertex.



1 x 0,55" DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector
Screen

2800

2100:1 full on/off

1,3333 min. Lumen

933 Lux (bei 200 cm Screen)

2100:1 full on/off

0,445 min. Lumen

SVGA 800 x 600
480.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

-

3000 h. 4000 h. in Eco Mode

-

Manual

Manual

-

-

2Wx1

RGB/Component Video 15 Pin D-Sub x 1
S-Video Mini Din 4 Pin x 1
Composite Video RCA x 1
USB Type B (Management)
Stereo Mini Jack 3.5mm x 1
RS232 x 1

Output:
RGB Monitor 15 Pin D-Sub x 1

-

250W

265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³

-

2,40 kg / 5,29 lbs.

Vert.: +/-16°


-

-

87 fL / max. 461 cm screen width
298 cd/m²

■ Eco Mode

- Discontinued (EOL) // Last update of the data: 2023-08-04

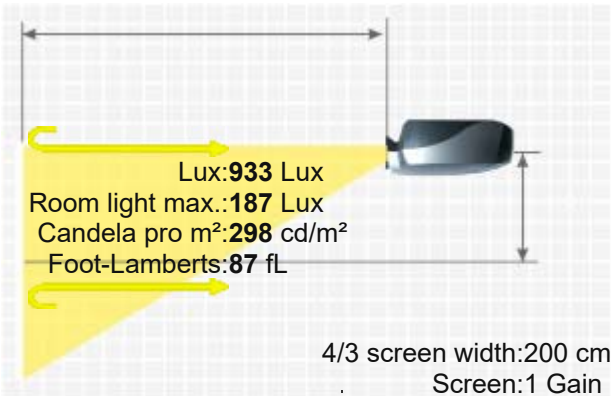

More Details



HCinema

<https://www.projector-database.com/pro/vertexsd210-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.