

Vidoseven PD600S



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

With the PD600S, manufacturer Videoseven offers a standard portable DLP projector with SVGA 800 x 600 resolution and a contrast of 2000:1. The projector will be able to illuminate a 348 cm image width well. However, if room light is available, the image width should ideally not exceed 232 cm. This model is no longer offered by Videoseven.



1 x 0,55" DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

1600

2000:1 full on/off

0,8000 min. Lumen

Screen

533 Lux (bei 200 cm Screen)

2000:1 full on/off

0,267 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

200W Lamp

Articel Nr.: LMP15690

2000 h.

-

Manual

Manual 1,2

F=2,5 f=28,8-34,5 mm

2,58-3,09:1

1 x 2W

D-sub 15pin in

Cinch Video in

S-Video in

Yes

260W

253 x 97 x 201 mm (10"x3,8"x7,9") 4,93 L/dm³

34dB

2,25 kg / 4,96 lbs.

Vert.: +/-15°

80%



H-sync: 15-100 kHz

V-sync: 43-120 Hz

Range max.: 140 MHz

50 fL / max. 348 cm screen width

171 cd/m²

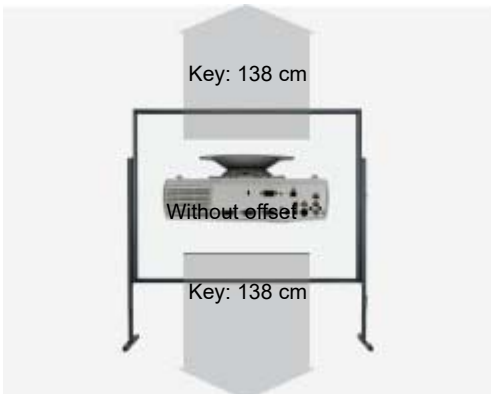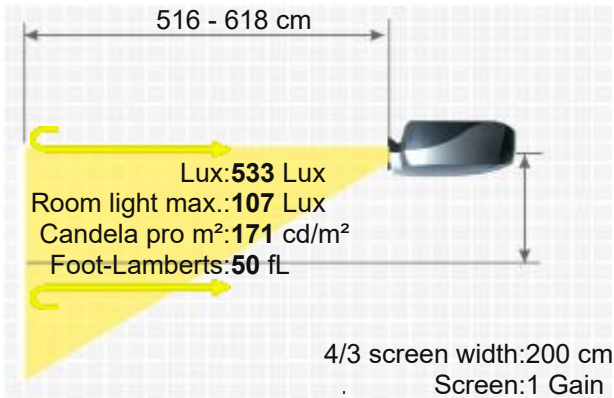

Features

- Blank (Black screen button)
- Gamma correction

Optional

Bulb only	NLMP15690
Lamp ruby	Ruby-LMP15690
Lamp original	LMP15690

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15690>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/videosevenpd600s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.