


Vidikron Vision THREE



VIDIKRON VISION THREE

Display Type	 8" EMF CRT UXGA 4/3 Elektromagnetisch Fokussierte Röhre	
Ansi-Lumen	225 / 1000 Peak Lumen	Screen 75 Lux (bei 200 cm Screen)
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	UXGA 1600 x 1200 1.920.000 Pixel	
Video Modes	NTSC, PAL, SECAM, HDTV	
Application	CRT Projection Very narrow picture width and rooms with very little light.	
Light Source	CRT Röhre 180DMB22	
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)	
Operating Costs	-	
Focus	Manual	
Zoom	-	
Objective	-	
Throw Ratio	-	
Audio	-	
Connections	1-RGB analog, separate H or V sync, composite sync, sync on green, 1-stereo audio in, 1-RS232C, 1-remote switcher, 1-Fernbedienung, 1-Variable audio line out, 1-RS232C out.	
Ceiling Mounting	-	
Power	-	
Size WxHxD	-	
Operating Noise	-	
Weight	-	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 30-110 kHz V-sync: 45-150 Hz Range max.: 100 MHz	
Foot-Lamberts	7 fL / max. 131 cm screen width 24 cd/m²	
Features	■ Gamma correction	
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04	
Data		

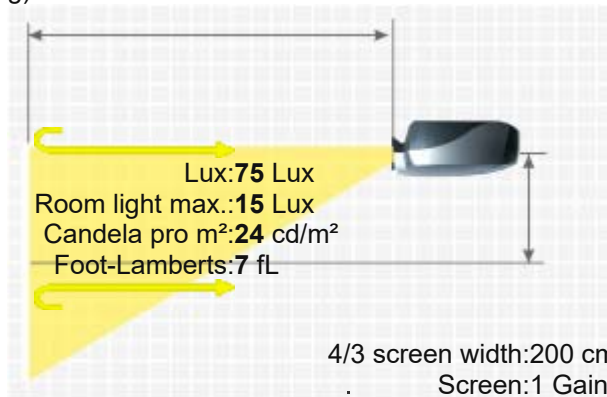

HCinema

<https://www.projector-database.com/pro/vidikronvisionthree-en.html>