

# Vision VX30

VISION VX30



## Brief Introduction

Beta 2.5

The standard portable VX30 DLP projector from Vision has 2300 Ansi lumens, a contrast of 1500:1 and an XGA 1024 x 768 resolution. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 418 cm is possible. However, the image should be smaller in room light. We recommend max. 279 cm. This model is no longer offered by Vision.



1 x 0,7" DDR DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Display Type

### Ansi-Lumen

### Contrast

### Black Level

### Offset

### Resolution

### Video Modes

### Application

### Light Source

### Light Life

### Operating Costs

### Focus

### Zoom

### Objective

### Throw Ratio

### Audio

### Connections

### Ceiling Mounting

2300  
1500:1 full on/off  
1,5333 min. Lumen

767 Lux (bei 200 cm Screen)  
1500:1 full on/off  
0,512 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W SHP Lamp

Articel Nr.: VX30

2000 h.

-

Manual

Manual 1,2

f=23,6-28,3 mm

1,65-1,99:1

2 x 1W

1 x HD-sub 15pin in und out

1 x DVI-I

1 x Cinch

1 x S-Video

1 x RS232C


1 x Controlport (PS2)

1 x USB

1 x 3,5 mm Klinke

1 x 3,5 mm Klinke out

Yes

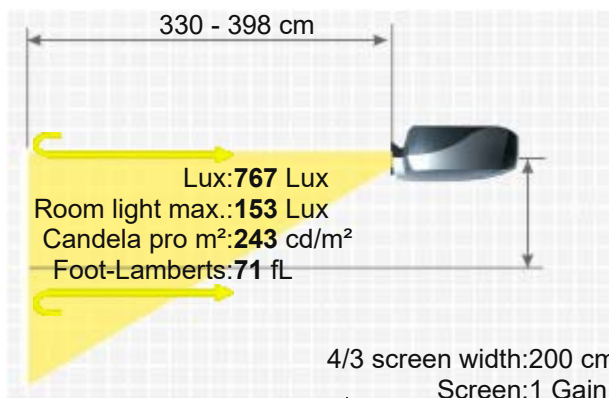

Power -  
Size WxHxD 285 x 95 x 235 mm (11,2"x3,7"x9,3") 6,36 L/dm³  
Operating Noise 33dB

Weight 2,60 kg / 5,73 lbs.  
Keystone Vert.: +/-20°  
Hori.: +/-10°


Illumination -

Frequenz H-sync: 15-100 kHz  
V-sync: 50-120 Hz

Foot-Lamberts 71 fL / max. 418 cm screen width  
243 cd/m²

Features ■ Picture-in-Picture

Status - Discontinued (EOL) // Last update of the data: 2023-08-04

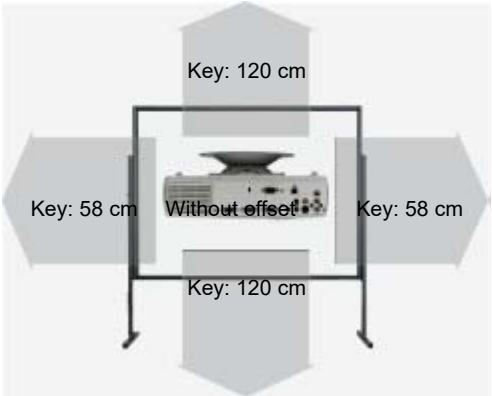

Data



More Details



HCinema

<https://www.projector-database.com/pro/visionvx30-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.