

Vivibright HD500



VIVIBRIGHT HD500



Brief Introduction

Beta 2.5

With the HD500, manufacturer Vivibright offers a standard portable LCD LED projector with VGA 640 x 480 resolution and a contrast of 600:1. Thanks to the LEDs, the projector has a light life of up to 20,000 hours, which is over 13.7 years if enjoyed for four hours a day. A picture width of up to 246 cm is possible. However, the picture should be smaller in room light. We recommend max. 164 cm. This model is no longer offered by Vivibright.

Display Type



1 x LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Ansi-Lumen

800

267 Lux (bei 200 cm Screen)

Contrast

600:1 full on/off

600:1 full on/off

Black Level

1,3333 min. Lumen

0,447 min. Lumen

Offset

-

Resolution

VGA 640 x 480

307.200 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

RGB LED

Light Life

20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

HDMI in

D-sub 15 pin in

S-Video in

Cinch Video in

Cinch Stereo in

Ceiling Mounting

-

Power

130W

Size WxHxD

280 x 120 x 250 mm (11"x4,7"x9,8") 8,4 L/dm³

Operating Noise

35dB

Weight

3,20 kg / 7,05 lbs.

Keystone

Vert.: +/-15°

Illumination

85%

Frequenz

H-sync: 15-150 kHz

V-sync: 48-190 Hz

Foot-Lamberts

25 fL / max. 246 cm screen width

86 cd/m²


Features

-

Status

2011 Discontinued (EOL) // Last update of the data: 2024-10-02

Data

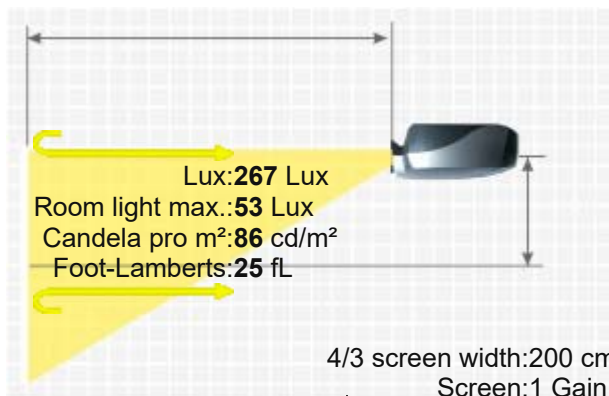



HCinema

<https://www.projector-database.com/pro/vivibrighthd500-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.