

Vivibright PRL2S



VIVIBRIGHT PRL2S



Brief Introduction

Beta 2.5

The Vivibright model PRL2S is a DLP LED projector with WVGA 854 x 480 resolution and a contrast of 1000:1. It is an LED projector with 20000 hours of light life, which is equivalent to over 13.7 years at 4 hours per day. Due to the brightness of 120 Ansi lumens, a picture width of 111 cm is possible. In room light, the picture should be max. 74 cm wide. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). This model is no longer offered by Vivibright.

Display Type



1 x 0,3"DLP Chip

WVGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 120

Screen 53 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

0,1200 min. Lumen

0,053 min. Lumen

Offset

-

Resolution

WVGA 854 x 480

409.920 Pixel

HDTV 1920 x 1080 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Game-Portabel | Very portable, small-screen projections.

Very narrow picture width and rooms with very little light.

Light Source

RGB LED Osram

Light Life

20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

-

Audio

2 x 1W

Connections

HDMI mit MHL in
Mini Jack Audio out
USB Typ A in
SD Card slot

Ceiling Mounting

-

Power

-

Size WxHxD

76 x 14 x 130 mm (3"x0,6"x5,1") 0,14 L/dm³

Operating Noise

-

Weight

0,260 kg / 0,57 lbs.

Keystone

-

Illumination

-

Frequenz

-


Foot-Lamberts

5 fL / max. 111 cm screen width

17 cd/m²

Features

-

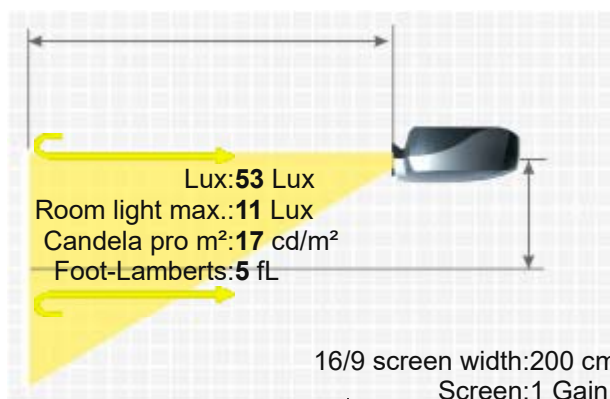

More Details



HCinema

<https://www.projector-database.com/pro/vivibrightprl2s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.