

Vivitek DX761Z-UST

VIVITEK DX761Z-UST



The short distance Vivitek DX761Z-UST 3D Laser DLP Beamer has a contrast of 20000:1 3800 Ansi miles and an XGA 1024 x 768 resolution. The laser means that the projector is indicated with 20,000 hours of light life, which would be with a daily look of 4 hours over 13.7 years. A built-in horizontal and vertical keystone correction brings freedom to set up the projector. Only 0.3:1 has this projector as a projection relationship. For a 2 m wide picture, the projector must stand only 60 cm away from the canvas. Also playing 1080P and 3D is no problem for the projector. The beamer is very quiet compared to others with 30 decibels operating noise. This model is no longer offered by Vivitek.

Brief presentation Beta 2.5

Projection system

 1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen	Projector	3800	Screen	1267 Lux (with 200 cm canvas)
Contrast	Projector	20000:1 full on/off	Screen	20000:1 full on/off
Black value	Projector	0.1900 min. Lumen	Screen	0.063 min. Lumen
Offset	Projector	--	Screen	--
Resolution	Projector	XGA 1024 x 768 786.432 pixels	Screen	
Playback signals	Projector	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p	Screen	
Disc detection	Projector	DVD HD Blu-ray (compressed) 3D Blu-ray (compressed) 4K-UHD-Blu-ray	Screen	
3D compatibility	Projector	Frame-Packing (Full HD 3D) Side-by-Side Top-and-Bottom Frame Sequential (3D Ready)	Screen	
Area of application	Projector	Short distance Presentations and external training as well as product presentations. Medium image width or rooms with some more room light max 200 lumens.	Screen	
Light source	Projector	Laser	Screen	
Light lifetime	Projector	20000 hours	Screen	
Operating costs	Projector	0,00 € da Laser	Screen	

The focus Manual


Zoom No zoom

Objective --

Projection ratio --

Audio 1 x 10W

Connections
HDMI 1.4b in
D-sub 15pin in and out
Cinch video in
Cinch Stereo in

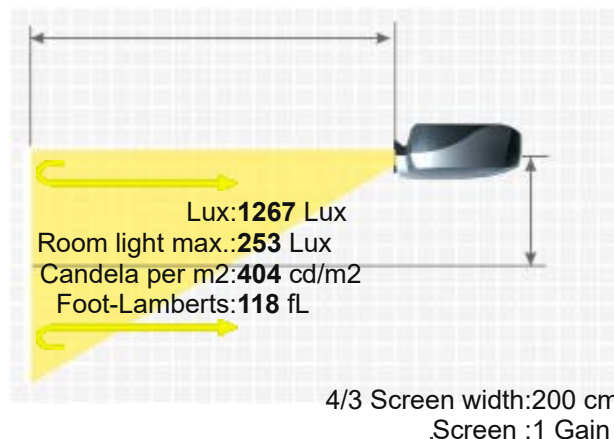

	Mini Jack Audio in and out USB Type A,B in RS232C Din 9 pin in RJ45 in
Ceiling mounting	YES
Electricity consumption	- -
Dimensions BxHxT	508.7 x 144.50 x 390 mm (20"x5,7"x155.4") 28.53 L/dm3
Operating noise	30 / 28 dB in Eco Mode

Weight	10,50 kg / 23,15 lbs.
Keystone correction	Vert.: +/-30° Hori.: +/-30°
illumination	- -
frequency	- -
Foot-Lamberts	118 fL / max. 537 cm image width
Candela per m2	413 cd/m2

Equipment (extras)	<div> <div></div> Real Full HD 3D </div> <div> <div></div> Full HD 1080P kompatibel </div> <div> <div></div> Eco Mode </div> <div> <div></div> Lan Netzwerk kompatibel. </div> <div> <div></div> Kurzdistanz Projektor </div>
--------------------	---

Screen Mirroring	- -
------------------	-----

Year of construction	2017 // Letzte Datenänderung: 2024-10-02 Angelegt: 2017-03-16 16:23:00
----------------------	---



More details



HCinema

<https://www.hcinema.de/pro/vivitekDX761Z-UST.html>

Due to our constant commitment to the continuous improvement of the quality of our projector database, this brochure can be subjected to change even without prior notice. HCinema is not liable for any errors or omissions contained in the product descriptions.