


Vivitek KU701Z

VIVITEK KU701Z

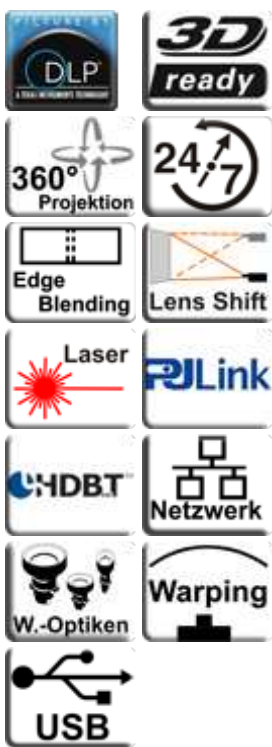

The Vivitek KU701Z 3D Laser DLP fixed-installation projector has 7,000 ANSI lumens, a contrast ratio of 3,000,000:1 and a WUXGA resolution of 1,920 x 1,200. It is a laser projector with a lamp life of 20,000 hours, which equates to over 13.7 years at 4 hours? use per day. The integrated lens shift provides flexibility when positioning the projector. The projector is capable of illuminating an image width of 800 cm effectively. In rooms with ambient light, the projector performs best with a narrower image width; we would recommend a maximum of 533 cm in such cases. Should the image width prove insufficient, the projector offers built-in edge blending software, which allows multiple projectors to combine their images to form a single large image. Furthermore, it is Full HD 1080p compatible and can therefore use 360 ? projection.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,67" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 7000

Screen 3111 Lux (200 cm Screen width)

Contrast

3000000:1 full on/off

Screen 3000000:1 full on/off

Black Level

0,0021 min. Lumen

Screen 0,001 min. Lumen

Lens shift

Vert.: +15% -5% Hori.: +/-2%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual x1,65

Objective

optional

Throw Ratio


optional

Audio

1 x 10W

Connections

2x HDMI in und 1x out
3D Sync out
D-sub 15pin in und out
Mini Jack Audio in
USB-A (5V/1.5A) in
Mini USB in

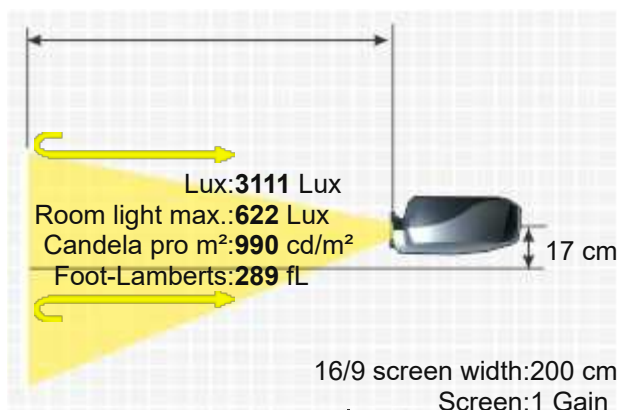

RS232C Din 9 pin in
RJ45 in
HDBaseT (Optional)




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
510W
496 x 160 x 380 mm (19,5"x6,3"x15") 30,16 L/dm³
34 / 30 dB in Eco Mode

Weight
Keystone
Illumination

12,00 kg / 26,46 lbs.
Vert.: +/-30°
Hori.: +/-30°
85%

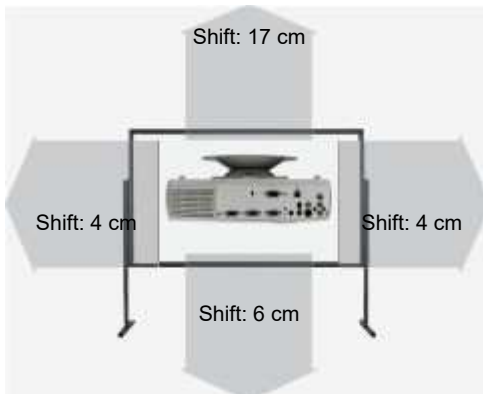

Frequenz
Foot-Lamberts

-
289 fL / max. 800 cm screen width
990 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- supports 21:9 aspect ratio
- Projector Control Software (Geometry, Colour, Lens, Picture)

Screen Mirroring

-

Please note

Offset (Full Image Width)
+98 ~ +122 / ST1:+98 ~ +121 / ST2 +98 ~ +122

Optional accessories

	Fernbedienung mit Laserpointer	5041841300	31,39 €
	Deckenhalterung weiß	Halterung45W	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Standart	1.15-1.9:1	230-380 m	15-5%	+/-2%	Manual
ST2	0.8-1.2:1	160-240 m	15-5%	+/-2%	Manual
ST1	0.5:1	100 m	15-5%	+/-2%	No Zoom

Status
2026 Current model // Last update of the data: 2026-09-04
Created: 2026-08-18 09:44:14

Data



More Details

HCinema

<https://www.projector-database.com/pro/vivitekku701z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.