

Vivitek RU7700Z

VIVITEK RU7700Z



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Brief overview of the Vivitek RU7700Z. This stationary DLP laser projector features a WUXGA 1920 x 1200 resolution and a contrast ratio of 3,000,000:1.



1 x 0,67" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Projector

10000 / 8000 ISO Lumen

3000000:1 full on/off

-

Screen

4444 Lux (200 cm Screen width)

-

-

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h. / 30000 h. in Eco Mode

0,00 € Laser

Powered


Powered

optional

optional

2 x 10W

2x HDMI 2.0 in
D-sub 15pin in und out
Cinch Stereo in
3D Sync in und out
5x BNC
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT
12V Trigger

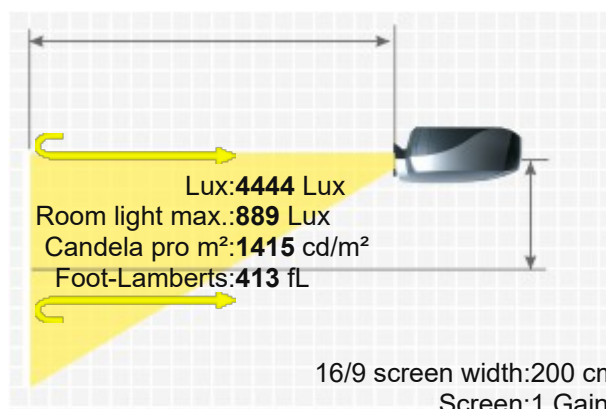



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
465W
470 x 202 x 517 mm (18,5"x8"x20,4") 49,08 L/dm³
40 / 38 dB in Eco Mode

Weight
Keystone
Illumination

20,60 kg / 44,09 lbs.
-
90%

Frequenz

-

Foot-Lamberts

413 fL / max. 964 cm screen width
1415 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Warping
- 360° installable
- 24/7 continuous operation capable
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.

Features

Screen Mirroring

-



Optional accessories



Deckenhalterung schwarz

Halterung45

83,60 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
D88-LOZ201	5.3-8.3:1	1060-1660 m	70-50%	+/-15%	Powered
D88-LOZ101	3.6-5.4:1	720-1080 m	70-50%	+/-15%	Powered
D88-SMLZ01	2.21-3.7:1	442-740 m	70-50%	+/-15%	Powered
D86-1929	2-3:1	400-600 m	70-50%	+/-15%	Powered
D86-1519	1.54-1.93:1	308-386 m	70-50%	+/-15%	Powered
D86-1216	1.26-1.6:1	252-320 m	70-50%	+/-15%	Powered
D86-1113	1.1-1.3:1	220-260 m	70-50%	+/-15%	Powered
D86-0711	0.77-1.1:1	154-220 m	70-50%	+/-15%	Powered

Status 2026 Current model // Last update of the data: 2026-06-29

Data



More Details

HCinema

<https://www.projector-database.com/pro/vivitekru7700z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.