

Vivitek Voyager AV400



VIVITEK VOYAGER AV400



Brief Introduction

Beta 2.5

A brief introduction to the Voyager AV400: The Vivitek LCD projector offers 750 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. 750 Ansi lumens ensure that an image width of 238 cm is also possible. However, if room light is available, the picture should be max. 159 cm wide. It is no longer offered by the manufacturer Vivitek.



3 x 1,3 LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

750

200:1 full on/off

3,7500 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

PAL, NTSC, Secam

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

150W UHE Lamp

2000 h.

-

Manual

Manual

-

-

2 x 2W

Cinch Video in

S-Video in

-

-

-

-

-

-

-

-

23 fL / max. 238 cm screen width

79 cd/m²

-


- Discontinued (EOL) // Last update of the data: 2023-08-04

-

250 Lux (bei 200 cm Screen)

200:1 full on/off

1.269 min. Lumen

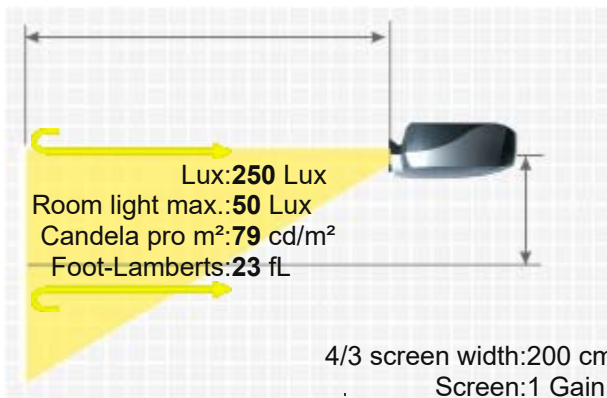



HCinema

<https://www.projector-database.com/pro/vivitekvoyagerav400-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.