

XGODY Gimbal A2

XGODY GIMBAL A2



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

The Micro-Portable XGODY Gimbal A2 LED LCD projector has 300 ANSI lumens and HDTV 1280 x 720 resolution. It is an LED projector with a light life of 30,000 hours, which is equivalent to over 20.5 years at 4 hours per day. The brightness of 300 ANSI lumens allows for an image width of 176 cm. In room lighting, the image should be no wider than 117 cm. The model recognizes Airplay and Miracast screen mirroring signals, making it possible to play high-resolution videos with surround sound directly via Wi-Fi from a smartphone, tablet, or PC (Android, Windows, and iOS). Even 1080P and 4K (compressed) video signals are no problem for the projector.

1 x LCD Panel
HDTV 16/9 Liquid Crystal Display

300
-
-

133 Lux (bei 200 cm Screen)
-
-

HDTV 1280 x 720

921.600 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Micro-Portabel | Small mobile presentations..

Very narrow picture width and rooms with very little light.

LED

30000 h.

0,00 € LED

Manual

No Zoom 50%-100% Digital

-

-

2 x 3W

HDMI in

Mini Jack Audio out


USB in

Yes, is possible.

-

90,5 x 167 x 90,5 mm (3,5"x6,6"x3,5") 1,35 L/dm³

-

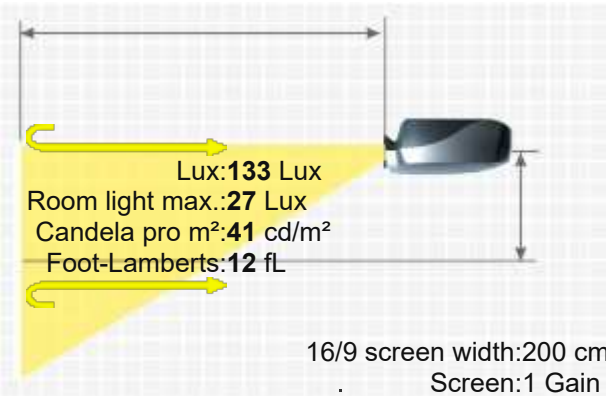

Weight -
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 12 fL / max. 176 cm screen width
41 cd/m²

- Features
- Full HD 1080P compatible
 - Wi-Fi network compatible.
 - Android 11.0
 - Auto 4P Keystone
 - 360° Gimbal

Screen Mirroring Miracast, Airplay, Windows
Status 2025 Current model // Last update of the data: 2025-07-17

Data



More Details



HCinema

<https://www.projector-database.com/pro/xgodygimbala2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.