

Digital Projection E-Vision 10000i 4K+ RGB



The Digital Projection E-Vision 10000i 4K+ RGB 3D laser DLP projector has 9000 ANSI lumens, a contrast ratio of 10000:1 and a WUXGA 1920 x 1200 resolution. Thanks to the laser, the projector is specified with a 20,000-hour light lifespan, which is over 13.7 years at four hours of enjoyment per day. An image width of up to 964 cm is possible because the projector has 9000 ANSI lumens. The projector can create rooms with low light with a smaller image width; we would recommend a maximum of 643 cm. If the image is still too small, the integrated edge blending software can help to project a large image using additional projectors. Furthermore, it is Full HD 1080P and 4K (compressed) compatible.

1 x 0,8" HEP DMD DLP Chip
UHD 4/3 Ti Digital Light Processing Chip

Projector	9000	Screen	3000 Lux (bei 200 cm Screen)
	10000:1 full on/off		10000:1 full on/off
	0,9000 min. Lumen		0,3 min. Lumen

Resolution: UHD (4K2K+) 3840 x 2400
9.216.000 Pixel / WUXGA E-Shift
Video Modes: Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p
3D Compatibility: Frame Sequential (3D Ready)

Application: Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.


Light Source: Laser
Light Life: 20000 h.

Operating Costs: 0,00 € Laser

Focus: Powered

Zoom: Powered 100% Digital Zoom

Objective: optional

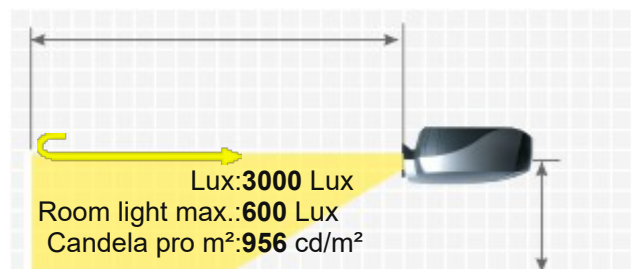

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source


Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio	optional	Foot-Lamberts:279 fL  4/3 screen width:200 cm Screen:1 Gain
Audio	Nein	
Connections	2x HDMI 2.0 in (HDCP) DisplayPort 1.2 12G-SDI in BNC 3G-SDI out BNC USB-A in RJ45 RS232C in und out Wired Remote in und out 12V Trigger	
Ceiling Mounting	Yes, is possible.	
Power	800W	
Size WxHxD	598 x 218 x 500 mm (23,5"x8,6"x19,7") 65,18 L/dm³	
Operating Noise	36 / 33 dB in Eco Mode	
Weight	29,40 kg / 63,93 lbs.	
Keystone	-	
Illumination	-	
Frequenz	-	
Foot-Lamberts	279 fL / max. 826 cm screen width 956 cd/m²	
Features	■ Full HD 1080P compatible ■ Blank (Black screen button) ■ Eco Mode ■ Kensington Slot ■ High Dynamic Range (HDR) ■ Warping ■ 24/7 continuous operation capable ■ Edge Blending ■ Picture-in-Picture ■ PJLink™ ■ Lan network compatible. ■ Crestron®-Software compatible. ■ DICOM Simulation ■ 24p and 1080p native display ■ AMX ■ Alert Mail for Projector ■ Selectable Dynamic Black ■ Nexus electronics platform	
Screen Mirroring	-	

Optional accessories					
	Deckenhalterung Länge 225 mm		Halterung45		85,80 €
Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
124-323	2.1-4:1	4.2-8 m	+/-60%	+/-20%	Powered
124-322	1.4-2.11:1	2.8-4.2 m	+/-60%	+/-20%	Powered
124-321	1.05-1.41:1	2.1-2.8 m	+/-60%	+/-20%	Powered
124-320	0.74-1.08:1	1.5-2.2 m	+/-50%	+/-15%	Powered
124-319	0.55-0.75:1	1.1-1.5 m	+/-50%	+/-15%	Powered
124-318	0.31-0.33:1	0.6-0.7 m	+/-50%		Powered
112-504	4.46-6.94:1	8.9-13.9 m	+/-45%	+/-20%	Powered
112-503	3-4.52:1	6-9 m	+/-45%	+/-20%	Powered
Status	2024 Current model // Last update of the data: 2025-03-03 Created: 2025-01-09 15:22:35				

1000014K+RGB

Data



More Details



HCinema

<https://www.projector-database.com/pro/digitalprojectionevision10000i4kplusrgb-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.