


InFocus IN5535/L

INFOCUS IN5535/L




With the IN5535/L, manufacturer InFocus offers a DLP projector with WUXGA 1920 x 1200 resolution and a contrast of 2000:1. The integrated media player allows files to be played directly. With the lens shift function, the projector can be positioned very freely. 6000 Ansi lumens ensure that a picture width of 787 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. Furthermore, the projector can play 1080P without any problems. The operating noise of just 29 decibels makes the projection quiet. The projector was launched in 2010 and is no longer sold by the manufacturer.

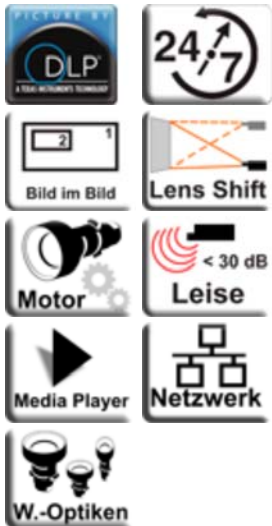

1 x 0,67" DC DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Display Type	Projector	6000 / 3150 im Eco Mode	Screen	2667 Lux (bei 200 cm Screen)
Ansi-Lumen		2000:1 full on/off		2000:1 full on/off
Contrast		3,0000 min. Lumen		1,335 min. Lumen
Black Level		Vert.: +60% -0% Hori.: +/-10%		
Lens shift		WUXGA 1920 x 1200		
Resolution		2.304.000 Pixel		
Video Modes		PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p		
Application		Media player formats: JPEG		
		Stationary Permanent installation in the training room and meeting room as well as the conference room.		
Light Source		Very large screen width and rooms with plenty of light and shaded daylight.		
Light Life		660 / 330Wim Eco Mode Lamp		
Operating Costs		Articel Nr.: SP-LAMP-IN55B		
		2000 h. 2500 h. in Eco Mode		

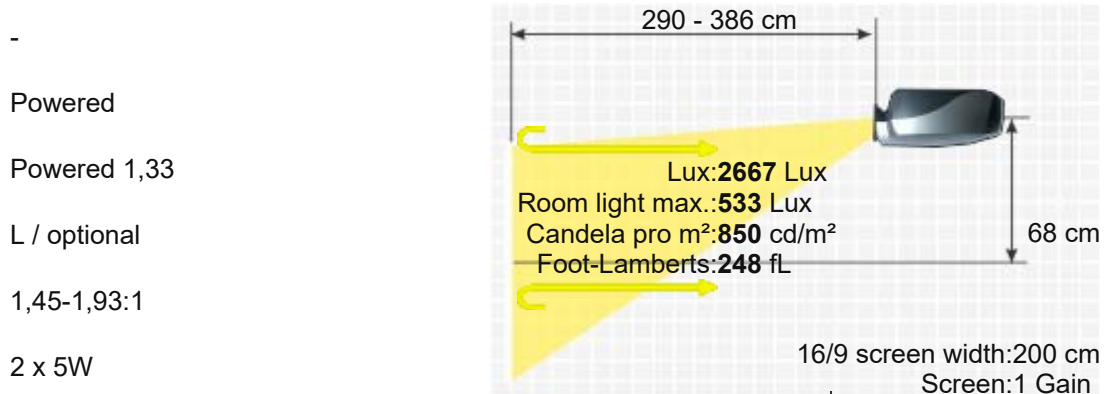

Focus	Powered
Zoom	Powered 1,33
Objective	L / optional
Throw Ratio	1,45-1,93:1
Audio	2 x 5W
Connections	2 x HDMI in 2 x D-sub 15 pin in 1 x out 5 x BNC RGBHV in YUV in S-video in

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Cinch Video in
Mini Jack Audio in und out
Cinch Stereo in
RS232C
RJ45
Ceiling Mounting Yes
Power 850 / 800W in Eco Mode
Size WxHxD 431,8 x 240 x 670,1 mm (17"x9,4"x26,4") 69,3 L/dm³
Operating Noise 29dB

Weight 20,00 kg / 44,09 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination -


Frequenz H-sync: 15-100 kHz
V-sync: 50-85 Hz
Foot-Lamberts 248 fL / max. 787 cm screen width
850 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Picture-in-Picture
- BrilliantColor™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- Digital zoom
- RGBYWC / 6-segment colour wheel

Optional	Bulb only Osram	NLMP19010
		NLMP19008
	Right 2 lamp Ruby	Ruby-LMP19010
	Left 1 lamp ruby	Ruby-LMP19008
	Lamp 1 left original	SP-LAMP-067 / SP-LAMP-055
	Lamp 2 right original	SP-LAMP-068 / SP-LAMP-056
	Twin lamp original	SP-LAMP-067B / SP-LAMP-IN67B / SP-LAMP-IN55B
	Compatible lamp	LMP-K19007
	Compatible lamp	LMP-K19009
	Universal Remote original	Fernb-uni-V3
	Object lens original	LENS-052
	Object lens original	LENS-050

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20182>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LENS-053	3.67-6.97:1	7.3-13.9 m	50-10%	+/-10%	Powered
LENS-052	1.93-3.67:1	3.9-7.3 m	50-10%	+/-10%	Powered
LENS-051	1.21-1.45:1	2.4-2.9 m	50-10%	+/-10%	Powered
Fix Optional Lenses					
LENS-050	0.77:1	1.5 m	0.0% Fix		No Zoom
Status	2010 Discontinued (EOL) // Last update of the data: 2023-08-14				

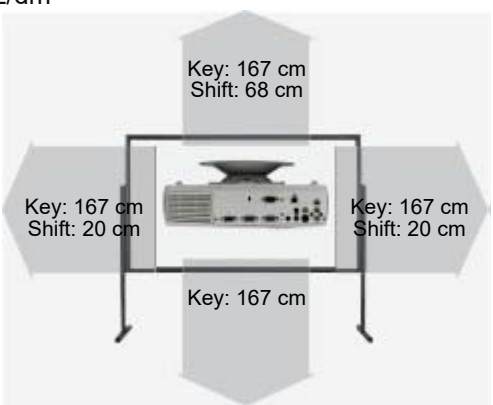



Data



More Details

HCinema

<https://www.projector-database.com/pro/infocusin5535-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.