

Optoma EX779/i

OPTOMA EX779/i



The standard portable EX779/i 3D BrilliantColor DLP has 4500 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. An image width of up to 584 cm is possible as the projector has 4500 Ansi lumens. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 389 cm. Furthermore, the projector can play 1080P without any problems. With only 30 decibels of operating noise, the model is already very quiet compared to others. The model built in 2010 is no longer offered by Optoma.

Brief Introduction Beta 2.5

Display Type

1 x 0,7" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4500

Screen 1500 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

Offset 1,5000 min. Lumen

0,501 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

280W P-VIP Lamp

Articel Nr.: BL-FP280E

Operating Costs

2000 h. 3000 h. in Eco Mode

-

Focus

Manual

Zoom

Manual 1,17

Objective

F=2,6-2,81 f=26,9-29,8 mm

Throw Ratio

1,8-2,1:1

Audio

3W

Connections

HDMI in


2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

RS232C

RJ45

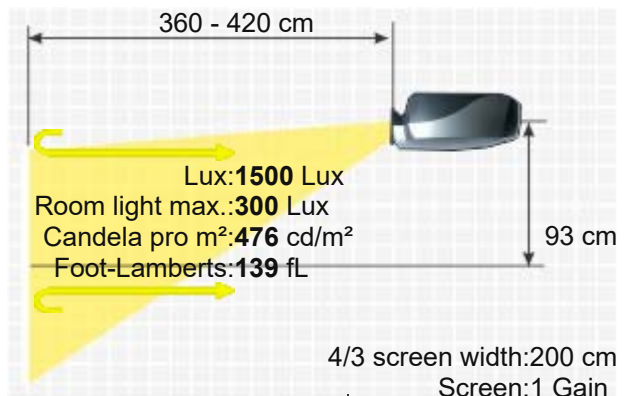

Ceiling Mounting
Power
Size WxHxD
Operating Noise

12V Trigger out
Yes
350 / 290W in Eco Mode
326 x 109 x 259 mm (12,8"x4,3"x10,2") 9,2 L/dm³
30 / 28 dB in Eco Mode

Weight
Keystone
Illumination

3,53 kg / 7,78 lbs.
Vert.: +/-30°
80%

Frequenz

H-sync: 15-91 kHz
V-sync: 25-120 Hz

Foot-Lamberts

139 fL / max. 584 cm screen width
476 cd/m²

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Digital image shift
- Password protection
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- Crestron®-Software compatible.

Features

Optional

- | | |
|-------------------------|--|
| Bulb only Osram | NLMP19832 |
| Lamp ruby | Ruby-LMP19832 |
| Lamp original | BL-FP280E / DE.5811116519-SOT / DE.5811116885-SOT |
| Compatible lamp | LMP-K19832 |
| Remote control original | BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L |
| Ceiling Mount 100-120 | Halterung100 |

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20084>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomaex779-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

