

Sharp XG P560W/N

SHARP XG P560W/N



A brief introduction to the Sharp XG P560W/N. The stationary DLP projector has a WXGA 1280 x 800 resolution and a contrast of 1800:1. The integrated lens shift gives freedom when positioning the projector. An image width of up to 787 cm is possible as the projector has 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. The model is also Full HD 1080P compatible. The model was built by Sharp in 2008 and is no longer current.



3 x 0,65" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Projector
6000
1800:1 full on/off
3,3333 min. Lumen

Screen
2400 Lux (bei 200 cm Screen)
1800:1 full on/off
1,335 min. Lumen

Vert.: +/-66% Hori.: +/-35%

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 280W Lamp

Articel Nr.: AN-P610LP

2000 h. 3000 h. in Eco Mode

-

Powered

Powered 1,25

f=25,5-32,0 mm / N optional

1,79-2,25:1

2 x 3W Stereo

DVI-D in

5 X BNC RGBHV in

D-sub 15 pin in

S-Video in

Cinch Stereo in

Mini Jack Audio in

RJ45 in

RS232C Din 9 pin in

Yes


710W

500 x 190 x 637 mm (19,7"x7,5"x25,1") 60,52 L/dm³

39 / 37 dB in Eco Mode

26,00 kg / 57,32 lbs.


Vertical und horizontal

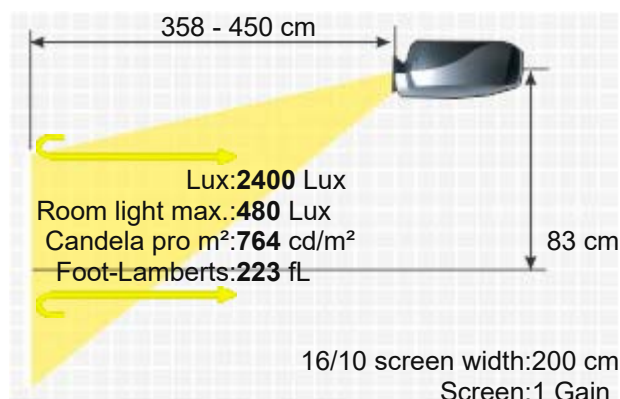

—

H-sync: 15-126 kHz
V-sync: 43-200 Hz

223 fL / max. 787 cm screen width
764 cd/m²



Shift: 70 cm

Shift: 83 cm

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Digital image shift
- Password protection
- Remote control with backlight
- PjLink™
- Control via web browser
- Lan network compatible.

Bulb only Osram

NLMP18492

Lamp ruby

Rubv-LMP18492

Lamp original

AN-P610LP

Compatible lamp

LMP-K18492

Universal Remote original

Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18932>

Optional Lenses

Ratio

Distance

Shift V

Shift H

Zoom

Zoom Optional Lenses

N-P15EZ	1.5-1.8:1	3-3.6 m	+/-66%	+/-35%	Powered
AN-P45EZ	4.5-7:1	9-14 m	+/-66%	+/-35%	Powered
AN-P30EZ	3-4:1	6-8 m			
AN-P23EZ	2.35-3:1	4.7-6 m	+/-66%	+/-35%	Powered
AN-P18EZ	1.8-2.25:1	3.6-4.5 m	+/-66%	+/-35%	Powered

Fix Optional Lenses

AN-P8EX	0.8:1	1.6 m	0.0% Fix	No Zoom
AN-P12EX	1.2:1	2.4 m		No Zoom

Status Data 2008 Discontinued (EOL) // Last update of the data: 2023-08-04



<https://www.projector-database.com/pro/sharpxqp560w-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCCinema is not responsible for any errors or omissions contained in product descriptions.