

3M™ Digital Projector MP4100



CONNECTIONS

Computer


- RGB
- PC Audio
- BNC

VIDEO

- Component Video
- S-Video
- RCA Composite
- Video Audio

BASIC SPECS

- 4,000 lumens
- XGA (1024x768)
- 6.5 kg
- HDTV ready
- 800:1 Contrast ratio

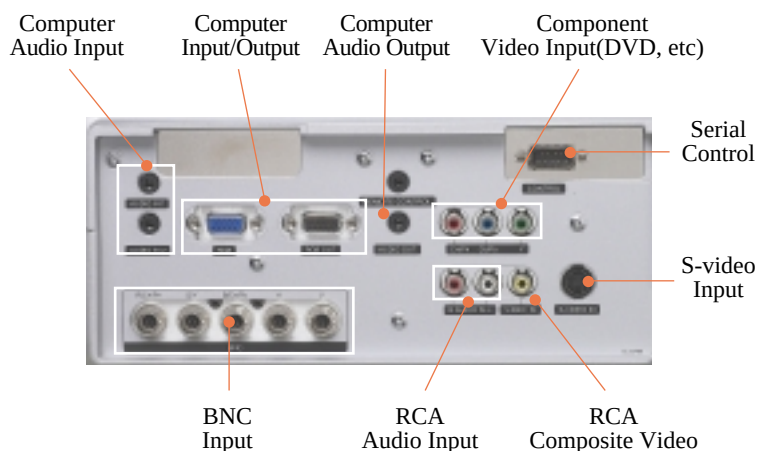

Model	3M MP4100
LCD Panel	0.99" P-si TFTx3
Resolution	XGA (1024 x 768)
Brightness	4,000 ANSI Lumens
Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA(Smart resizing), UXGA compatibility
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, PAL60 SDTV : 525i(480i), 525p(480p), 625i(575i) HDTV : 750p(720p@60Hz), 1125i(1080i@60Hz), 1035i@60Hz)
Contrast	800:1 typical
Keystone Correction	Vertical ± 15 degree
H-sync range	15 - 91 kHz
V-sync range	50 - 120 Hz
Zoom / Focus	Power
Image size	40 " ~ 500 "
Aspect ratio	4:3 (Standard)
Computer Input	15pin Mini-Dsub x 1 BNC(x5) x 1 (shared with Component)
Computer Output	15pin Mini-Dsub x 1 (from selected computer Input) 15pin Mini-Dsub or BNC
Video Input	RCA jack x 1, S-Video jack(x3) x 1 for component BNC(x3) x 1 (shared with Computer)
Audio Input	RCA jack(x2) x 1 for video Stereo-mini jack x 2 for computer
Audio Output	Stereo-mini jack x 1 (Selected OUT)
Control	9pin Dsub x 1 for RS232
Speaker	1.0 W x 2
Lamp	UHB 310W
Power	100-120V/220-240V, auto switching
Dimensions	420 x 150 x 310 mm (W x H x D)
Weight	6.5 kg

PROJECTION DISTANCE CHARTS - 3M MP4100									
Distance to Screen		Screen Size			Distance to Screen		Screen Size		
Minimum	Maximum	Diagonal	Width	Height	Minimum	Maximum	Diagonal	Width	Height
3.92ft. 1.2m	5.92ft. 1.8m	40in. 101.6cm	32in. 81.3cm	24in. 61.0cm	25ft. 7.6m	38ft. 11.6m	250in. 635cm	200in. 508.0cm	150in. 381.0cm
7.83ft. 2.4m	12.17ft. 3.7m	80in. 203.2cm	64in. 162.6cm	48in. 121.9cm	31ft. 9.4m	46ft. 14m	300in. 762.0cm	240in. 609.6cm	180in. 457.2cm
9.83ft. 3.0m	15.08ft. 4.6m	100in. 254.0cm	80in. 203.2cm	60in. 152.4cm	36ft. 11m	53ft. 16.2m	350in. 889.0cm	280in. 711.2cm	210in. 533.4cm
15.08ft. 4.6m	22.67ft. 6.9m	150in. 381.0cm	120in. 304.8cm	90in. 228.6cm	41ft. 12.5m	61ft. 18.6m	400in. 1016.0cm	320in. 812.8cm	240in. 609.6cm
20.33ft. 6.2m	30.17ft. 9.2m	200in. 508.0cm	160in. 406.4cm	120in. 304.8cm	51ft. 15.5m	76ft. 23.2m	500in. 1270cm	400in. 1016.0cm	300in. 762.0cm



한국쓰리엠주식회사

영상시스템 사업팀
서울시 영등포구 여의도동 27-3 대한투자신탁증권빌딩 20층
고객 상담실: 080-033-4114
<http://www.3mmeetings.co.kr>