

Alphapro evente 1030



Brief Introduction

Beta 2.5

The stationary evente 1030 LCD has 3000 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be max. 318 cm wide. This model is no longer offered by Alphapro.

Display Type

3 x 1,8 psi TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3000

971 Lux (bei 203 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

8,5714 min. Lumen

2.799 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Stationär | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

400W UCMH Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,46

Objective

F=2,5-3,0 f=56-82 mm

Throw Ratio

1,53-2,24:1

Audio

3W Stereo

Cinch Video in
3 x Audio Eingang
1 x Audio Ausgang
2 x D-sub 15pin in
1 x VGA Ausgang
S Video Eingang
RS232C Controuler
Maus Port Eingang

Connections

Ceiling Mounting

Yes

Power

520W

Size WxHxD

341 x 341 x 132 mm (13,4"x13,4"x5,2") 15,35 L/dm³

Operating Noise

35dB

Weight

7,00 kg / 15,43 lbs.

Keystone

-


Illumination

-

Frequenz

H-sync: 15-140 kHz

V-sync: 45-180 Hz

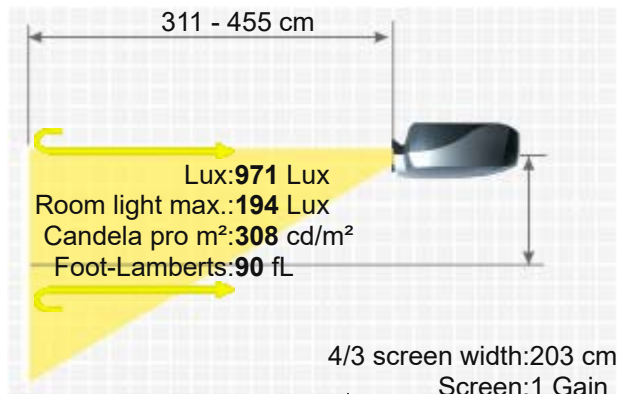

Foot-Lamberts

90 fL / max. 477 cm screen width

308 cd/m²

■ Freeze

■ 360° installable

■ Remote control with laser pointer

■ Mouse 360-degree drag and drop

■ , digital zoom

■ Lamp timer in menu

Status Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/alphaproevente1030-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.