

Boxlight Pro4000



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable Pro4000 LCD has 4000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. The projector can illuminate images up to 551 cm wide thanks to its 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended. This model is no longer offered by Boxlight. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.



3 x 0,99" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

4000

500:1 full on/off

8,0000 min. Lumen

Screen

1333 Lux (bei 200 cm Screen)

500:1 full on/off

2,682 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

250W Lamp

Articel Nr.: MP60E-930

2000 h.

-

Manual

Manual 1,3

F=1,7-2,4 f=33,4-43,3 mm

1,66-2,15:1

2 x 1W

DVI-I

D-sub 15pin in und out

YUV in

Cinch Video in

S-Video in

Mini Jack

USB

RS232C




Yes

300W


366 x 119 x 289,6 mm (14,4"x4,7"x11,4") 12,59 L/dm³

35dB

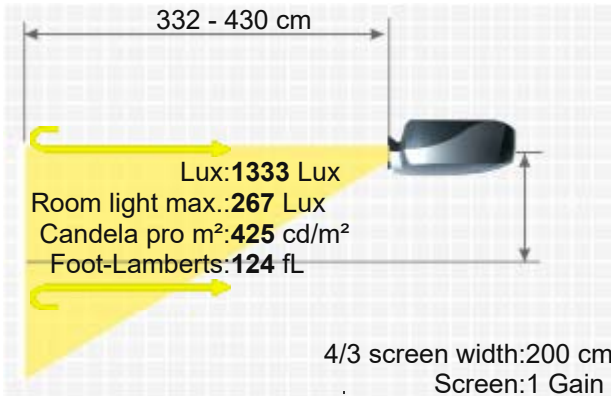

Key: 89 cm

Weight	5,90 kg / 13,01 lbs.
Keystone	Vert.: +/-15° Hori.: +/-15°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	124 fL / max. 551 cm screen width 425 cd/m²
Features	■ Eco Mode ■ Picture-in-Picture
Status Data	2006 Discontinued (EOL) // Last update of the data: 2023-08-04

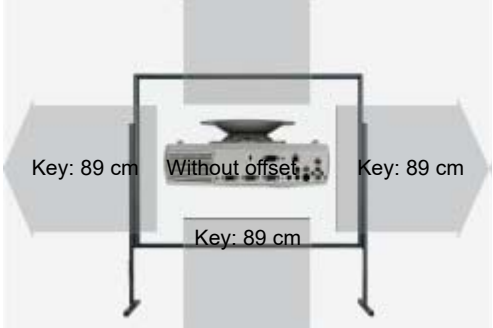

More Details



HCinema

<https://www.projector-database.com/pro/boxlightpro4000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.