

ChiStar CX 765+



CHISTAR CX 765+



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

A brief introduction to the CX 765+: The ChiStar DLP projector offers 3000 Ansi lumens, a contrast of 2600:1 and an SVGA 800 x 600 resolution. Thanks to the horizontal and vertical keystone correction, the projector can be positioned very freely. An image width of up to 477 cm is possible as the projector has 3000 Ansi lumens. However, if room light is available, the picture should be max. 318 cm wide. The model is no longer offered by ChiStar.



1 x DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

3000

2600:1 full on/off

1,1538 min. Lumen

Screen

1000 Lux (bei 200 cm Screen)

2600:1 full on/off

0,385 min. Lumen

-

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W Lamp

2000 h.

-

Manual

Manual

-

-

-

DVI

D-sub 15pin in und out

Cinch Video in

S-Video in

Yes

-

328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm³

36dB

3,50 kg / 7,72 lbs.

Vert.: +/-15°

Hori.: +/-10°

80%

H-sync: 15-100 kHz

V-sync: 43-120 Hz


Range max.: 230 MHz

93 fL / max. 477 cm screen width

319 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

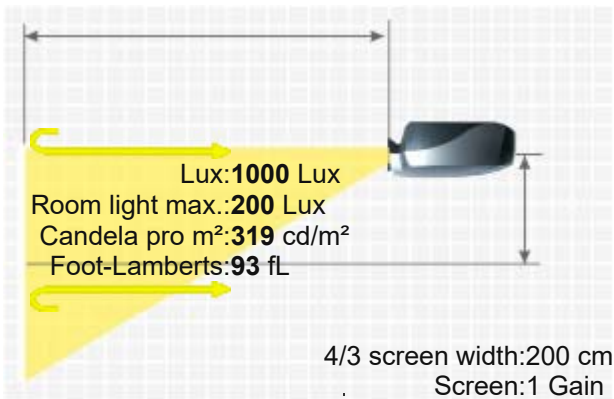

More Details



HCinema

<https://www.projector-database.com/pro/chistarcx765plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.