

Epson EMP 8300/NL

EPSON EMP 8300/NL



A brief introduction to the Epson EMP 8300/NL. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 1200:1. The built-in lens shift and keystone correction function provides freedom when setting up. The projector can illuminate images up to 628 cm wide thanks to its 5200 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 419 cm is recommended. It was launched in 2003 and is no longer offered by the manufacturer Epson.



3 x 1,4" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

5200
1200:1 full on/off
4,3333 min. Lumen
Vert.: +/-50% motorisch
XGA 1024 x 768

Screen

1682 Lux (bei 203 cm Screen)
1200:1 full on/off
1.405 min. Lumen

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

SXGA 1280 x 1024 compressed

PAL, PAL-M, PAL-N, SECAM, NTSC 3,58; NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

320W UHE Lamp

Articel Nr.: ELP LP23

2000 h. 3000 h. in Eco Mode

Powered


Powered 1,36

F=1,7-2,2 f=53-72 mm / NL optional

1,86-2,54:1

ja

1 x DV I - D
2 x D-Sub 15 Pin
1 x 5BNC
1 x S-Video
1 x RCA Buchse
2 x Mini Jack in 1 x out
2 x RCA VideoBuchse

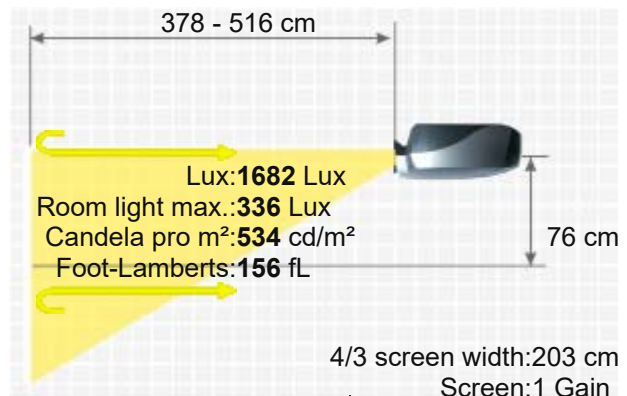

2 x Stereo RCA Buchse
 1 x RS232C
 1 x Maus
 2 x USB
 1 x RJ45 (Netzwerk)



Ceiling Mounting -
 Power 480W / 1,5W standby
 Size WxHxD 349 x 179 x 491 mm (13,7"x7"x19,3") 30,67 L/dm³
 Operating Noise 36dB

Weight 11,20 kg / 24,69 lbs.
 Keystone Vert.: +/-45° automatisch
 Illumination 90%
 Frequenz H-sync: 15-107 kHz
 V-sync: 50-120 Hz
 Range max.: 230 MHz
 Foot-Lamberts 156 fL / max. 628 cm screen width
 534 cd/m²

- Lens shift Funktion motorisch
- Freeze
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Picture-in-Picture
- Password protection
- Remote control with mouse control
- Lan network compatible.
- Digital Zoom
- EasyMP.net

Features



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Epson ELPLW02	1.29-1.84:1	2.6-3.7 m	+/-50%		Powered
Epson ELPLM02	3.58-5.43:1	7.3-11 m	+/-50%		Powered
Epson ELPLM01	2.41-3.67:1	4.9-7.5 m	+/-50%		Powered
Epson ELPLL04	5.33-7.15:1	10.8-14.5 m	+/-50%		Powered
Fix Optional Lenses					
Epson ELPLR02	0.87:1	1.8 m	0.0% Fix		No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



HCinema

<https://www.projector-database.com/pro/epsonemp8300-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.