

Epson USA PowerLite 4100



EPSON USA POWERLITE 4100



The PowerLite 4100 LCD has 4500 Ansi-Lumen, a contrast of 1000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. 584 cm image width, the projector will be able to illuminate well. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 389 cm here. Playing 1080P is also no problem for the projector. It was launched in 2010 and is no longer offered by the manufacturer Epson USA.

Brief Introduction

Display Type



3 x 0,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

4500

1500 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

4,5000 min. Lumen

1,505 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275W UHE Lamp

Articel Nr.: ELPLP62 / V13H010L62

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,81

Objective

F=1,65-2,55 f=21,28-37,94 mm

Throw Ratio

1,29-2,34:1

Audio

7W Mono

D-sub 15 pin in und out

5 x BNC RGBHV in


S-Video in

Cinch Video in


Cinch Stereo in

RJ45 in

RS232C

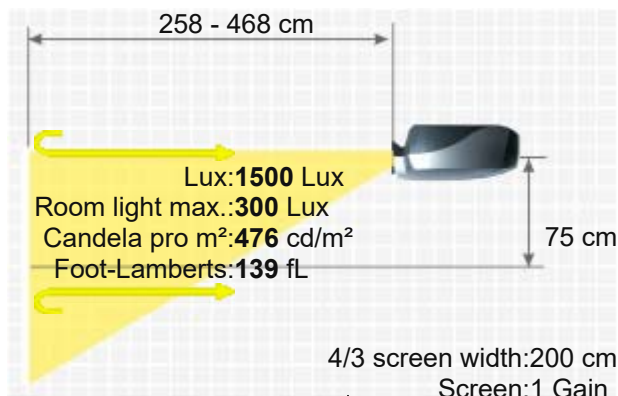

Connections

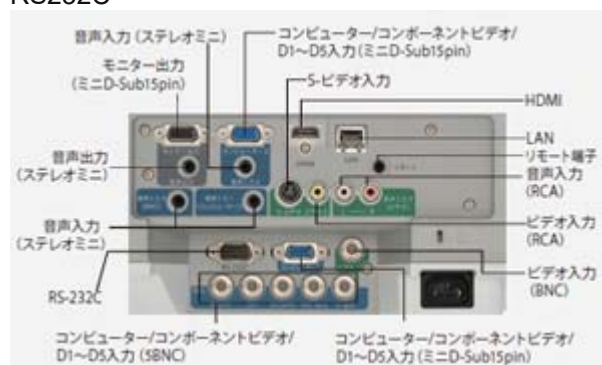

Ceiling Mounting Yes
Power 390 / 323W in Eco Mode
Size WxHxD 470 x 135 x 311,5 mm (18,5"x5,3"x12,3") 19,73 L/dm³
Operating Noise 38 / 31 dB in Eco Mode

Weight 6,70 kg / 14,77 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°
Illumination -
Frequenz H-sync: 15-92 kHz
V-sync: 50-85 Hz
Range max.: 162 MHz
Foot-Lamberts 139 fL / max. 584 cm screen width
476 cd/m²

- Full HD 1080P compatible
 - Lens shift Funktion
 - Freeze
 - Eco Mode
 - Kensington Slot
 - sRGB
- Features
- Password protection
 - PJLink™
 - Control via web browser
 - Lan network compatible.
 - Overscan adjustable
 - Digital zoom
 - DICOM simulation

	Bulb only	NLMP24022
	Lamp ruby	Ruby-LMP24022
	Lamp original	ELPLP62 / V13H010L62
	Compatible lamp	LMP-K19942
Optional	Universal Remote original	Fernb-uni-V3
	Air filter compatible	Alternative zu:ELPAF17 / V13H134A17
	Remote control original	1531179
	Air filter original	ELPAF17 / V13H134A17
	Ceiling Mount 100-120	Halterung100
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n19942	

Optional Lenses


Status Data 2010 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/epsonpowerlite4100-en.html>

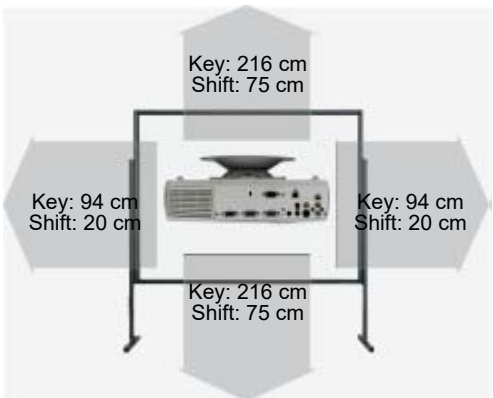

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.