

Hitachi LP-WU3500

HITACHI LP-WU3500



With the LP-WU3500, manufacturer Hitachi offers a stationary DLP LED projector with WUXGA 1920 x 1200 resolution and a contrast of 30000:1. The manufacturer specifies an LED service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. 601 cm image width, the projector will be able to illuminate well. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 401 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The model built in 2016 is no longer offered by Hitachi.

Brief Introduction

Beta 2.5

Display Type

1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

3500

1556 Lux (bei 200 cm Screen)

Contrast

30000:1 full on/off

30000:1 full on/off

Black Level

0,1167 min. Lumen

0,052 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-4%

Resolution

WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

LED-Phosphor

Light Life

Articel Nr.: HL03037 / R025H
20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual 1,64

Objective


-

Throw Ratio

1,3-2,30:1


Audio

-

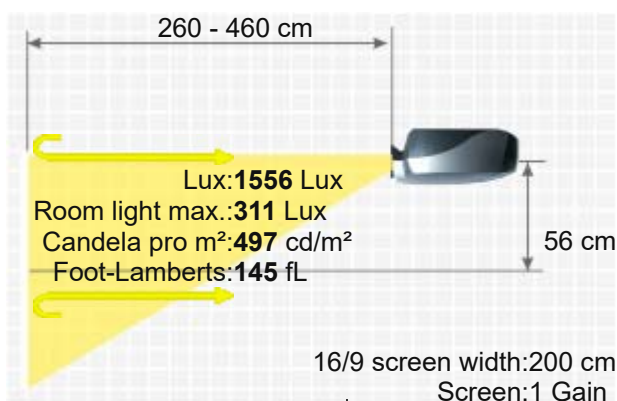

2 x HDMI mit MHL in 1 x out
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 mit HDBaseT in

Connections

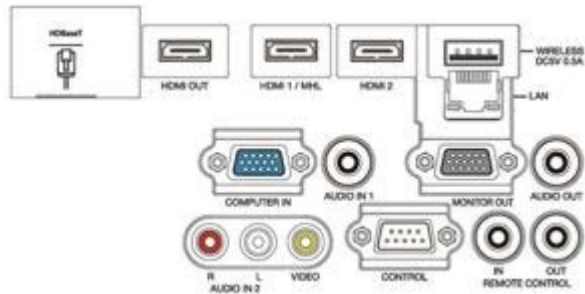

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
550W
396,2 x 132,1 x 454,7 mm (15,6"x5,2"x17,9") 23,73 L/dm³
-

Weight
Keystone
Illumination

14,51 kg / 30,86 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz
Foot-Lamberts

H-sync: 15-106 kHz
V-sync: 50-120 Hz
145 fL / max. 601 cm screen width
497 cd/m²

Features

- Lens shift Funktion
- Eco Mode
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Picture-in-Picture
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.
- Dicom simulation



Optional

Remote control original HL03037 / R025H

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9001836>
2016 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2016-10-27 13:38:14

Data

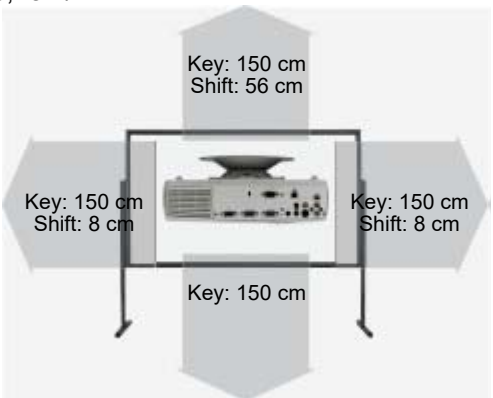

More Details



HCinema

<https://www.projector-database.com/pro/hitachilpwu3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.