

Optoma ProScene ZU920TST

OPTOMA PROSCENE ZU920TST



A brief overview of the ProScene ZU920TST: The Optoma 3D laser DLP projector offers 8,200 ANSI lumen, a contrast ratio of 1100:1, and a WUXGA resolution of 1920 x 1200. The manufacturer specifies a laser lifespan of 30,000 hours, which, at four hours of use per day, equates to over 20.5 years. The lens shift function allows for great flexibility in setting up the projector. Since it is a short-throw projector, it can be placed very close to the wall. For a 2-meter-wide image, the projector needs to be positioned just 130 cm away from the screen. The projector also handles 1080p and 4K (compressed) video signals as well as 3D with ease, meaning it can support all currently available Blu-ray formats.

Brief Introduction

Beta 2.5

Display Type



1 x DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 8200

Screen 3644 Lux (200 cm Screen width)

Contrast

1100:1 full on/off

1100:1 full on/off

Black Level

7,4545 min. Lumen

3,32 min. Lumen

Lens shift

Vert.: +/-55% Hori.: +/-25%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

UHD (4K2K) 3840 x 2160 compressed

Disc Recognition

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (komprimiert)

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Short Distance | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

DuraCore Laser

Light Life

Article Nr.: BR-3074W / SP.72N03GC01

30000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered 1,15

Objective

f=9,69-11,19 mm

Throw Ratio

0,65-0,75:1

Audio

2 x 10W

Connections

2x HDMI in


3D Sync

D-sub 15pin in und out

S-Video in

Mini Jack Audio in und out

USB in

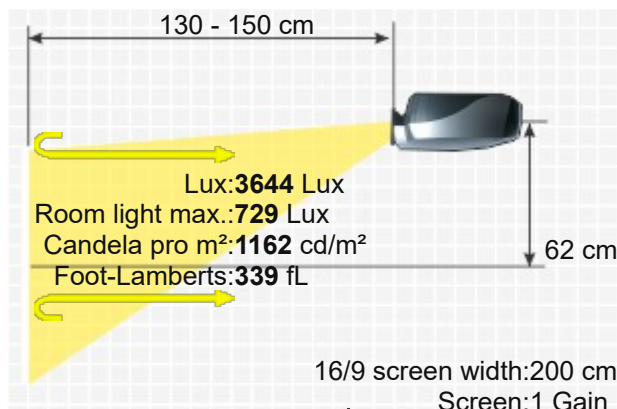

RS232C Din 9 pin in
RJ45 in
12 V Trigger




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
505W / 260W ECO
486 x 176 x 417,4 mm (19,1"x6,9"x16,4") 35,67 L/dm³
38 / 36 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz

14,00 kg / 30,86 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

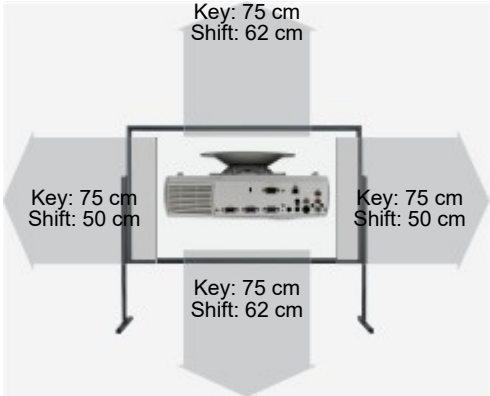

Foot-Lamberts

339 fL / max. 920 cm screen width
1162 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- 24/7 continuous operation capable
- Lan network compatible.
- Short-throw projector

Screen Mirroring

-

Optional accessories



Fernbedienung Original

BR-3074W / SP.72N03GC01

44,33 €



Deckenhalterung weiß

Halterung45W

83,60 €

Status

2021 Current model // Last update of the data: 2026-06-29
Created: 2026-03-19 14:59:50

Data



More Details

HCinema

<https://www.projector-database.com/pro/optomaproscenezu920tst-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.