


Panasonic PT DZ16K2

PANASONIC PT DZ16K2



With the PT DZ16K2, manufacturer Panasonic offers a large-screen DLP projector with HDTV 1920 x 1080 resolution and a contrast of 10000:1. The projector also offers a lens shift function that makes image adjustment childs play. An image width of up to 1285 cm is possible as the projector has 16000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 857 cm. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Even 1080P video signals are no problem for the projector. The model was built by Panasonic in 2015 and is no longer current.

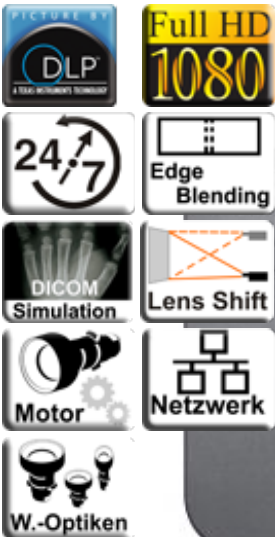

3 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

16000

10000:1 full on/off

1,6000 min. Lumen

Vert.: +/-60% Hori.: +/-20%

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

4 x 420W UHM Lamp

Article Nr.: ET-LAD520F

3000 h.

39,02% / 2,4 €

Powered

Powered

optional

optional

Nein


HDMI in
DVI-D in
D-sub 15pin in
5 x BNC RGBHV in
BNC Video in
RS232C Din 9 pin in und out
RJ45 in

7111 Lux (bei 200 cm Screen)

10000:1 full on/off

0,711 min. Lumen

Screen

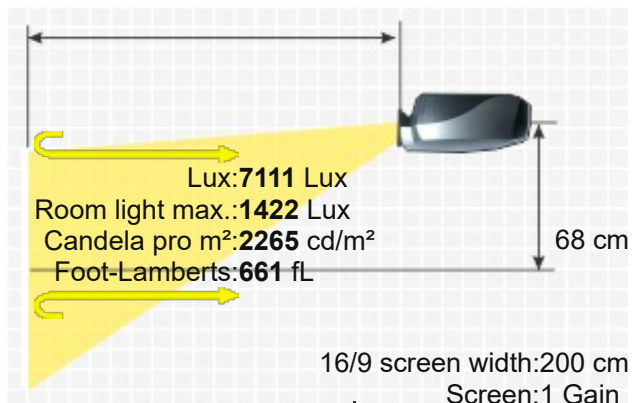

SDI IN BNC x 1 (3G/HD/SD-SDI)

DIGITAL LINK

3D SYNC in und out

Yes, is possible.

2060W

620 x 291 x 800 mm (24,4"x11,5"x31,5") 144,34 L/dm³

46dB

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Screen Mirroring

41,00 kg / 90,39 lbs.

Vert.: +/-40°

Hori.: +/-15°

H-sync: 15-100 kHz

V-sync: 24-120 Hz

Range max.: 162 MHz

661 fL / max. 1285 cm screen width

2265 cd/m²

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Eco Mode

■ Dynamic iris

■ 24/7 continuous operation capable

■ Edge Blending


■ Lan network compatible.

■ Picture-in-picture

■ DICOM simulation

■ Liquid-cooled system

-

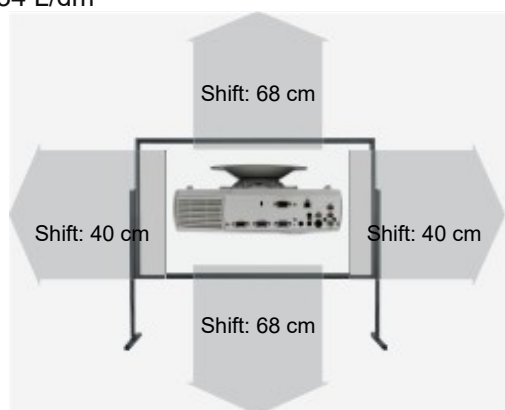

Optional accessories

	4-er Pack Lampe Ruby	Ruby-LMP23592	1.239,92 €
	Portrait 4-er Pack Lampe Original	ET-LAD520PF	1.827,33 €
	Portrait Einzel Lampe Original	ET-LAD520P	696,51 €
	4-er Pack Lampe Original	ET-LAD520F	1.802,43 €
	Einzel Lampe Original	ET-LAD520	696,51 €
	Luftfilter Kompatibel	Alternative zu:ET-EMF510	60,99 €
	Objektiv Original	ET-D75LE8	11.301,03 €
	Objektiv Original	ET-D75LE6	EOL €
	Objektiv Original	ET-D75LE30	3.991,38 €
	Rental Frame Original	ET-RFD21-AR	EOL €
	Rental Frame Original	ET-RFD21	EOL €
	Objektiv Original	ET-D75LE10	5.273,02 €
	Objektiv Original	ET-D75LE20	3.711,02 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	N2QAYB001052 / N2QAYB001176	107,64 €
	Rauch-Luftfilter Original	ET-SFR510	142,74 €

	Luftfilter Original	ET-EMF510	225,47 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-D75LE8	7.3-13.8:1	14.6-27.6 m	+/-60%	+/-20%	Powered
ET-D75LE6	0.9-1.1:1	1.8-2.2 m	+/-50%	+/-15%	Powered
ET-D75LE4	4.6-7.4:1	9.2-14.8 m	+/-60%	+/-20%	Powered
ET-D75LE30	2.4-4.7:1	4.8-9.4 m	+/-60%	+/-20%	Powered
ET-D75LE20	1.7-2.4:1	3.4-4.8 m	+/-60%	+/-20%	Powered
ET-D75LE10	1.3-1.7:1	2.6-3.4 m	+/-60%	+/-20%	Powered

Fix Optional Lenses					
ET-D75LE5	0.7:1	1.4 m	0.0% Fix		No Zoom


Status2015 Discontinued (EOL) // Last update of the data: 2025-03-03
 Created: 2015-02-10 14:54:29

Data









More Details



HCinema

<https://www.projector-database.com/pro/panasonicptdz16k2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
 HCinema is not responsible for any errors or omissions contained in product descriptions.