

Panasonic PT-MW730 -L

PANASONIC PT-MW730 -L



A brief introduction to the Panasonic PT-MW730 -L. The LCD laser projector has a WXGA 1280 x 800 resolution and a contrast of 3000000:1. Due to the laser, the projector is specified with 20000 hours of light life, which converts to over 13.7 years at 4 hours per day. The integrated media player can play files directly. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. An image width of up to 909 cm is possible as the projector has 8000 Ansi lumens. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 606 cm. Even 1080P video signals are no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. On the market since 2018, the model is no longer offered by the manufacturer Panasonic.



3 x 0,76" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector	8000	Screen	3200 Lux (bei 200 cm Screen)
Contrast	3000000:1		3000000:1
Black Level	0,0027 min. Lumen		0,001 min. Lumen

Vert.: +/-67% Hori.: +35% -%

Resolution
WXGA 1280 x 800
1.024.000 Pixel

Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Media player formats: mov avi mp4 mpg/mpeg wmv jpg/jpeg bmp

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Articel Nr.: N2QAYA000150

20000 h.

Operating Costs
0,00 € Laser

Focus
Powered


Zoom
Powered 1,65

Objective
F=1,7-2,3 f=26,9-45,5 mm /L optional

Throw Ratio
1,7-2,8:1

Audio
10W Mono

Connections
HDMI in
D-sub 15pin in und out
Cinch Video in

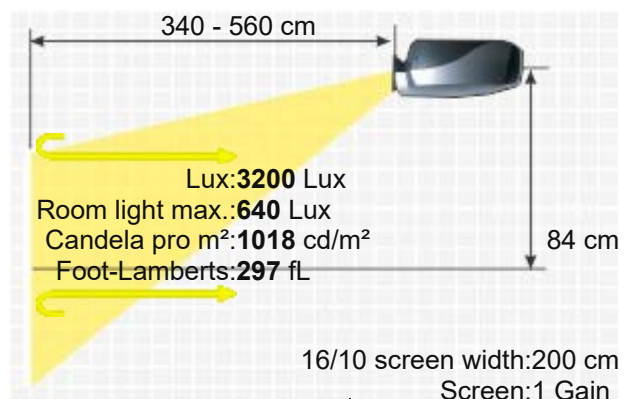

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in
Ceiling Mounting Yes
Power 570W
Size WxHxD 560 x 205 x 443 mm (22"x8,1"x17,4") 50,86 L/dm³
Operating Noise 35 / 28 dB in Eco Mode

Weight 16,00 kg / 35,27 lbs.
Keystone Vert.: +/-30°
Hori.: +/-25°
Illumination 90%
H-sync: 15-91 kHz
Frequenz V-sync: 24-100 Hz
Range max.: 162 MHz
Foot-Lamberts 297 fL / max. 909 cm screen width
1018 cd/m²

- Full HD 1080P compatible
 - Lens shift Funktion
 - Integrated Mediaplayer
 - Eco Mode
 - 360° installable
- Features
- 24/7 continuous operation capable
 - PJLink™
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - DICOM simulation
 - Model pt mw730 -I is without lens


Optional	Remote control original	N2QAYA000150 / N2QAYA000167
	Air filter original	ET-RFM100
	Ceiling bracket original	ET-PKD120S
	Ceiling bracket original	ET-PKD120H
	Object lens original	ET-ELW22 / LNS-W22
	Object lens original	ET-ELW21 / LNS-W21
	Object lens original	ET-ELW20 / LNS-W20
	Object lens original	ET-ELT21 / LNS-T21
	Object lens original	ET-ELT20 / LNS-T20
	Object lens original	ET-ELS20 / LNS-S20

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002347>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-ELW22	0.8-1:1	1.6-2 m	+/-60%	+/-30%	Powered
ET-ELW22	0.78-0.98:1	1.6-2 m			
ET-ELW20	1.2-1.7:1	2.4-3.4 m	+/-67%	+/-35%	Powered
ET-ELT21	4.4-7.1:1	8.8-14.2 m	+/-67%	+/-35%	Powered
ET-ELT20	2.7-4.5:1	5.4-9 m			Powered
ET-ELS20	1.6-2.8:1	3.2-5.6 m	+/-67%	+/-35%	Powered
Fix Optional Lenses					
ET-ELW21	0.8:1	1.6 m	0.00% Fix		No Zoom

Status 2018 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2018-09-05 09:14:38

Data

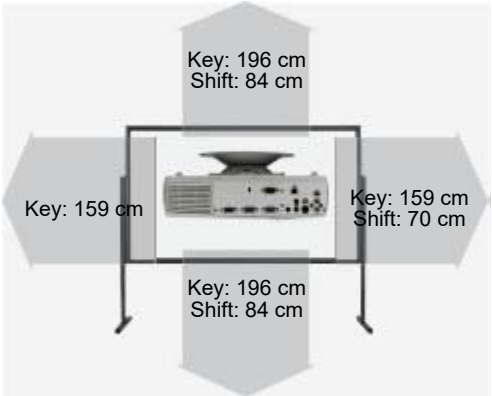



HCinema

<https://www.projector-database.com/pro/panasonicptmw730-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.