PHILIPS

ProPix 650

Business Projector

Deliver impactful presentations with the Philips ProPix 650

The Philips ProPix 650 is the perfect choice for corporate and educational settings, offering great clarity and detail with its impressive 4000 ANSI lumens of brightness. Operating at only 29 dBA (Eco Mode), the ProPix 650 is ideal for meeting rooms and classrooms. This projector delivers stunning 1280x800 WXGA resolution and 2000:1 native contrast ratio, ensuring your presentations are always crisp and clear.

Connectivity is seamless with the ProPix 650, featuring HDMI and VGA inputs. Additionally, the integrated RS232 port allows for easy remote control and monitoring, ensuring smooth operations and minimal downtime.

The Philips ProPix 650 uses only UHP lamps by Signify, designed to provide perfect stable colour spectrum and picture quality over the longest lifetime, up to 6,000 hours of lamp life, which is twice of other lamp-based projectors in the market.

Improve your efficiency with the ProPix 650's energy-saving Eco Mode, which significantly reduces power consumption and extends lamp life to an impressive 10,000 hours. This means fewer lamp replacements and lower maintenance costs for your business.

Lumens							
Philips UHP Lamp by Signify	WXGA resolution 1280x800	Up to 150"	Keystone	Speakers	Silent	302x218x99mm	2.5 kg 5.5 lbs

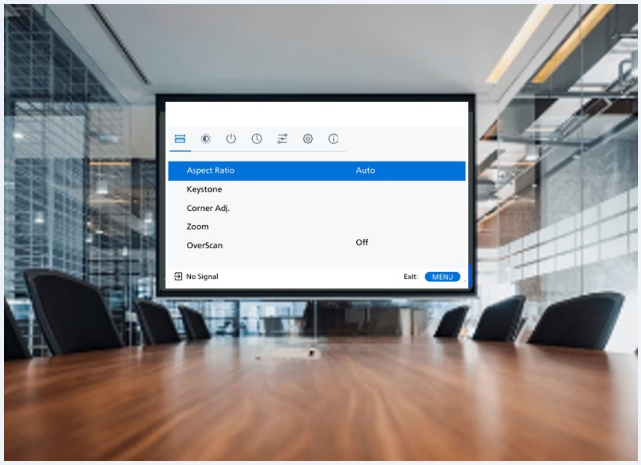

Specifications

Technology

Display technology: DLP (0.65” DMD)
Light source: UHP Lamp, Philips 200W by Signify
Lamp lifetime: 6,000/10,000hourss (Normal/Eco)
Lumens: 4000 ANSI
Colorimetry & metadata : REC 709
Contrast ratio: 2000:1 (FOFO native)
Resolution: 1280 x 800 pixel
Throw ratio: 1.49:1
Screen size (diagonal): from 70” to 150”
Screen distance: 120” screen @ 156” / 396 cm
Aspect ratio: Auto/4:3/16:9/16:10/Native
Projection Modes: 4
Focus adjustment: manual
Vertical Keystone: manual, +/- 40 degrees
Digital Zoom: yes
Sleep Timer: yes
3D Support: yes

Connection

HDMI in: x1
VGA computer input: x2
VGA monitor output: x1
USB Type A: x1
USB Type Mini B: x1
S-Video in (Mini DIN 4pin): x1
RS232 in (DB-9pin): x1
Input audio (3.5 mm audio in): x1
Output audio (3.5 mm audio out): x1

Sound

Internal speaker: 2 Watts

Dimensions

Unpacked (WxDxH):
302 x 218 x 99 mm
Weights: 2.5 kg

Packed (WxDxH): 410x170x297mm
Weights: 4.1 kg

Inside the Box

Projector
Remote control with AAA batteries
Quick start guide
Power cable
Warranty card

Model

PRX650/INT
EAN INT: 7640186962551

Lamp: UHP 200-170W 0.8 E20.7i Fusion Ai
Model: (UHP200W) PPA3002
EAN INT: 7640186962742

DLP® and the DLP logo are registered trademarks of Texas Instruments.

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

PHILIPS and the PHILIPS' Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used by SCREENEO INNOVATION SA under license from Koninklijke Philips N.V.

© 2024 SCREENEO INNOVATION SA
All rights reserved. The information and specifications included are subject to change without prior notice. SCREENEO INNOVATION SA tries to ensure that all information in this document is correct, but does not accept liability for error or omission.