

Ricoh IPSiO PJ WX3131



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Ricoh IPSiO PJ WX3131 LCD projector has 2500 Ansi lumens, a contrast of 320:1 and a WXGA 1280 x 800 resolution. The projector can illuminate an image width of up to 508 cm thanks to its 2500 Ansi lumens. In room light, however, the image width should ideally be less than 339 cm. This model is no longer offered by Ricoh. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.



3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector

2500

320:1 full on/off

7,8125 min. Lumen

Screen

1000 Lux (bei 200 cm Screen)

320:1 full on/off

3,149 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190 / 144W im Eco Mode Lamp

Articel Nr.: 431027

3000 h. 4000 h. in Eco Mode

-

Manual

Manual 1,21

F=1,75-1,87 f=19,2-23,10 mm

1,51-1,82:1

1W Mono

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

Mini jack Audio in und out


RS232C Din 9 pin in

-

280W

272 x 82 x 189 mm (10,7"x3,2"x7,4") 4,22 L/dm³

-

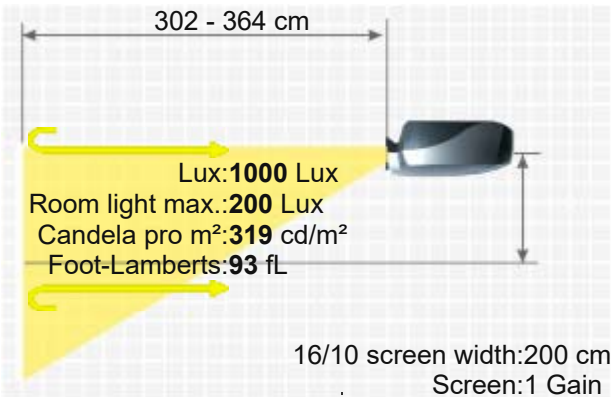

Weight	1,80 kg / 2,2 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15,63-106 kHz V-sync: 50-85 Hz
Foot-Lamberts	93 fL / max. 508 cm screen width 319 cd/m²
Features	■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Password protection
Status	2011 Discontinued (EOL) // Last update of the data: 2023-10-17

Data



More Details



HCinema

<https://www.projector-database.com/pro/ricohpjwx3131-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.