

Runco VX 22i

RUNCO VX 22i



The VX 22i DLP projector from Runco has 2850 Ansi lumens, a contrast of 4000:1 and an HDTV 1920 x 1080 resolution. The projector also offers a lens shift function that makes image adjustment childs play. An image width of up to 542 cm is possible. However, the image should be smaller in room light. We recommend max. 361 cm. Furthermore, the projector can play 1080P without any problems. The model built in 2006 is no longer offered by Runco.



3 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

2850

4000:1 full on/off

0,7125 min. Lumen

Vert.: +62% -32% Hori.: +/-12%

HDTV 1920 x 1080

2.073.600 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

300W Lamp

Articel Nr.: 151-1042-00

2000 h.

-

Powered

Powered

optional

optional

-

1 x DVI-D
12V Trigger out

Yes

530W

531 x 258 x 753 mm (20,9"x10,2"x29,6") 103,16 L/dm³


-

1267 Lux (bei 200 cm Screen)

4000:1 full on/off

0,317 min. Lumen

Screen

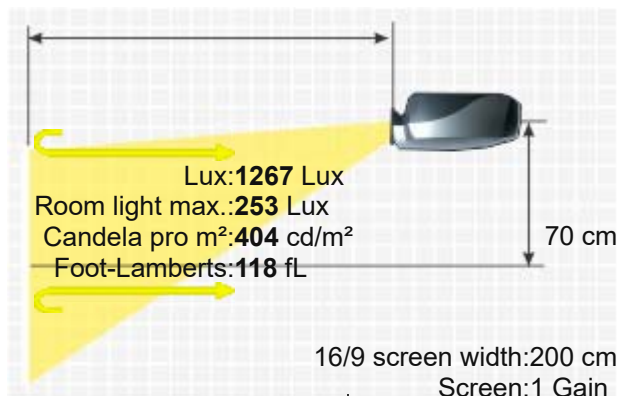

Weight 45,00 kg / 99,21 lbs.
Keystone -
Illumination 90%
Frequenz -
Foot-Lamberts 118 fL / max. 542 cm screen width
404 cd/m²
Features
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Gamma correction
■ Overscan adjustable

Optional
Bulb only NLMP22109
Lamp ruby Ruby-LMP22109
Lamp original 151-1042-00

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n22107>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
E: Zoom 4.30 – 7.00	4.3-7:1	8.6-14 m	63-30%	+/-12%	
D: Zoom 2.57 – 4.20	2.57-4.2:1	5.1-8.4 m	65-28%	+/-12%	Powered
C: Zoom 1.85 – 2.53	1.85-2.53:1	3.7-5.1 m	62-32%	+/-12%	Powered
B: Zoom 1.40 – 1.81	1.4-1.81:1	2.8-3.6 m	61-30%	+/-12%	Powered
Fix Optional Lenses					
A-2: Fixed 1.155	1.16:1	2.3 m	71-31%	+/-17%	No Zoom
A-1: Fixed 0.70	0.7:1	1.4 m	+/-10%	+/-5%	No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/runcovx22i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

